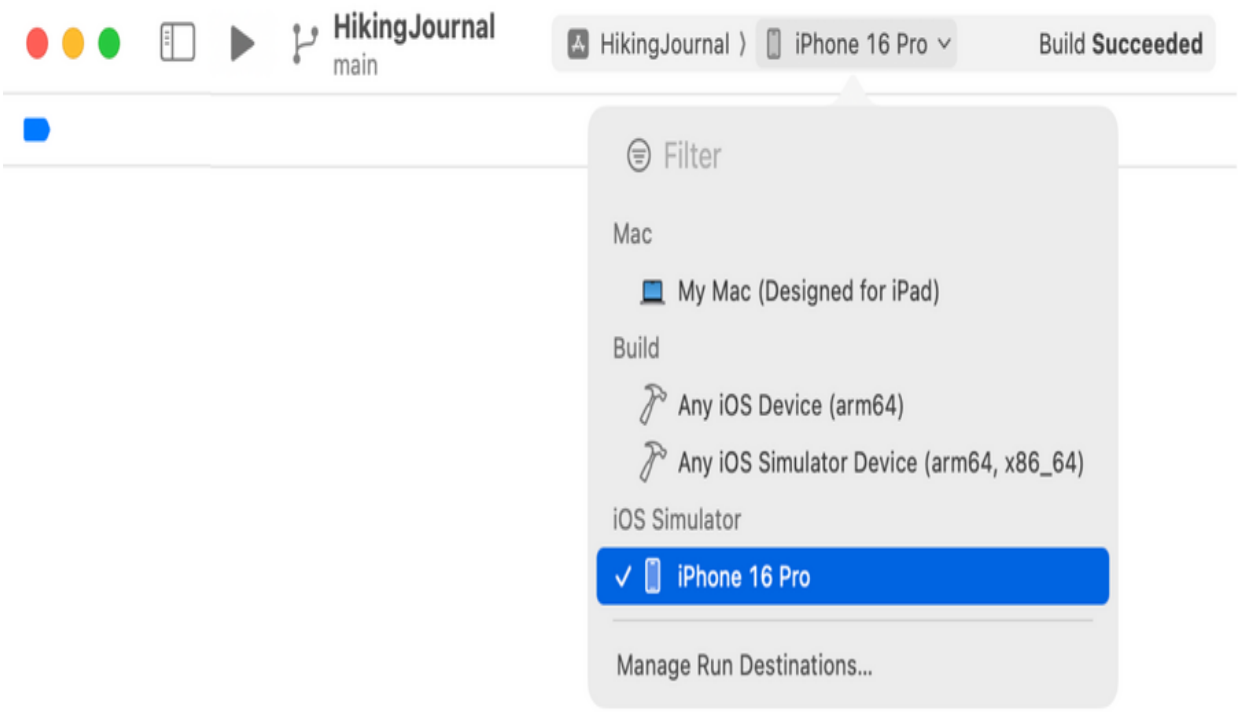


Click Product → Run or press ⌘ R to build and run your app. If all went well, you should see a very exciting, completely blank, white screen in the simulator!

As exciting as launching an app in the simulator may be, I'd like the app to actually do something useful. Up next, you'll add the Hotwire Native package to start filling that white space with content from the Rails app.

Add the Hotwire Native Package

Hotwire Native is added to the app as a Swift package. Swift packages are like Ruby gems, allowing you to use third-party code in your project.

Add the Hotwire Native package by clicking File → Add Package Dependencies… in Xcode. An interface to the Swift Package Manager will appear, Swift's equivalent to Bundler.

Enter the following hotwire-native-ios package URL in the search box at the upper right (as seen in the following screen). Change the Dependency Rule