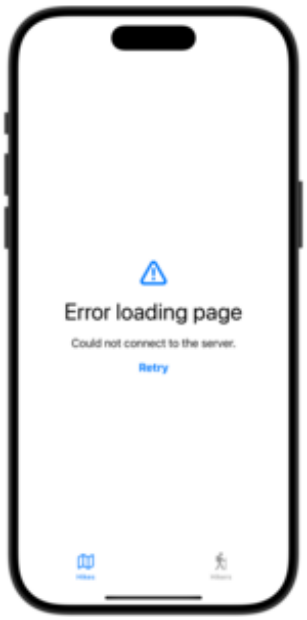


Oh, well, that's unfortunate. It looks like our iOS device can't connect to the server running on our Mac. Can you guess why?

In `SceneDelegate` we set `baseURL` to `localhost`. That works fine when running in the simulator—it creates a round trip back to your Mac. But "localhost" on a physical device is the iOS device itself, not the Mac. You need the TestFlight builds to point directly to your Mac, via its IP address. To do this, you need to update `baseURL` for release builds.

In your terminal, run `networksetup -getinfo Wi-Fi` and copy the value of your IP address. Here, mine is `192.168.50.139`.

```
~ networksetup -getinfo Wi-Fi
DHCP Configuration
IP address: 192.168.50.139
Subnet mask: 255.255.224.0
Router: 192.168.128.1
Client ID:
IPv6: Automatic
IPv6 IP address: none
IPv6 Router: none
Wi-Fi ID: 5c:e9:1e:6b:08:f4
```