
```
            android:allowBackup="true"
            android:dataExtractionRules="@xml/data_extraction_rules"
            android:fullBackupContent="@xml/backup_rules"
            android:icon="@mipmap/ic_launcher"
            android:label="@string/app_name"
            android:roundIcon="@mipmap/ic_launcher_round"
            android:supportsRtl="true"
            android:theme="@style/Theme.HikingJournal"
»           android:usesCleartextTraffic="true"
            tools:targetApi="31">
            <activity
                android:name=".MainActivity"
                android:exported="true">
                <intent-filter>
                    <action android:name="android.intent.action.MAIN" />

                    <category android:name="android.intent.category.LAUNCHER" />
                </intent-filter>
            </activity>
        </application>

    </manifest>
```

OK, the time has come…run the app again by pressing the green arrow at the top of the screen or by clicking Run → Run ‘app’.

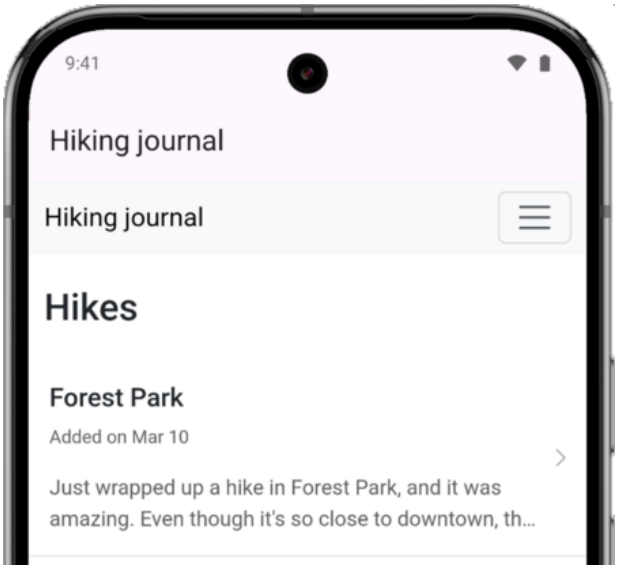

You did it! You created a brand-new Android Studio project and integrated Hotwire Native from scratch. Nice work. As you can see, there’s a fair