
Native," for backward compatibility with the old library) to the user agent on every request, so no additional code is needed in the apps.

Use this method in `app/views/shared/_navbar.html.erb` to skip the rendering of the navigation bar for Hotwire Native apps, as follows:

ch02_05/rails/app/views/shared/_navbar.html.erb

```
» <% unless hotwire_native_app? %>
    <nav class="navbar bg-body-tertiary">
      <div class="container">
        <%# ... %>
      </div>
    </nav>
» <% end %>
```

The navigation bar is now hidden from the native apps but is still visible on mobile web, as shown in the screenshot.

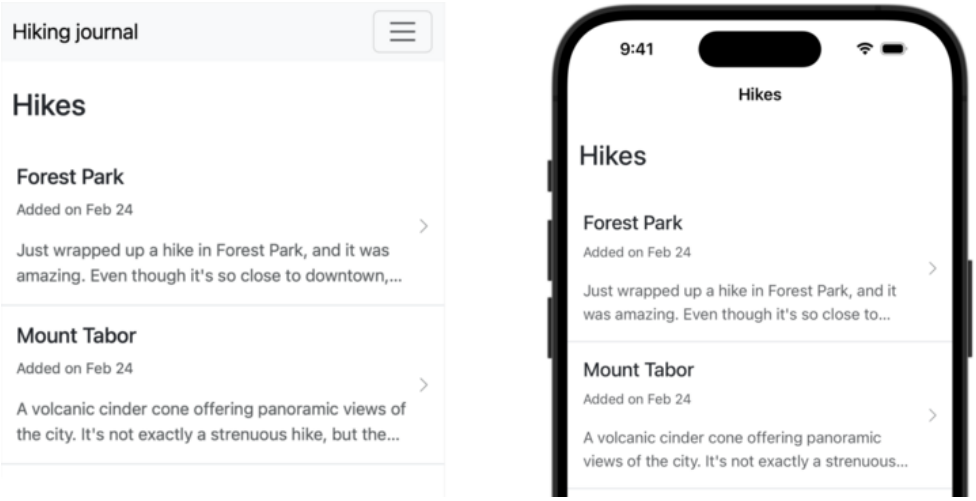

Using `hotwire_native_app?` to conditionally render content works great. You're given full control over what to send to the native apps and what to only render on mobile web. But this approach has a trade-off. Sending different HTML, depending on the user agent, can break caching. To know which HTML to send, the cache now *also* needs to be aware of the user agent of the request.