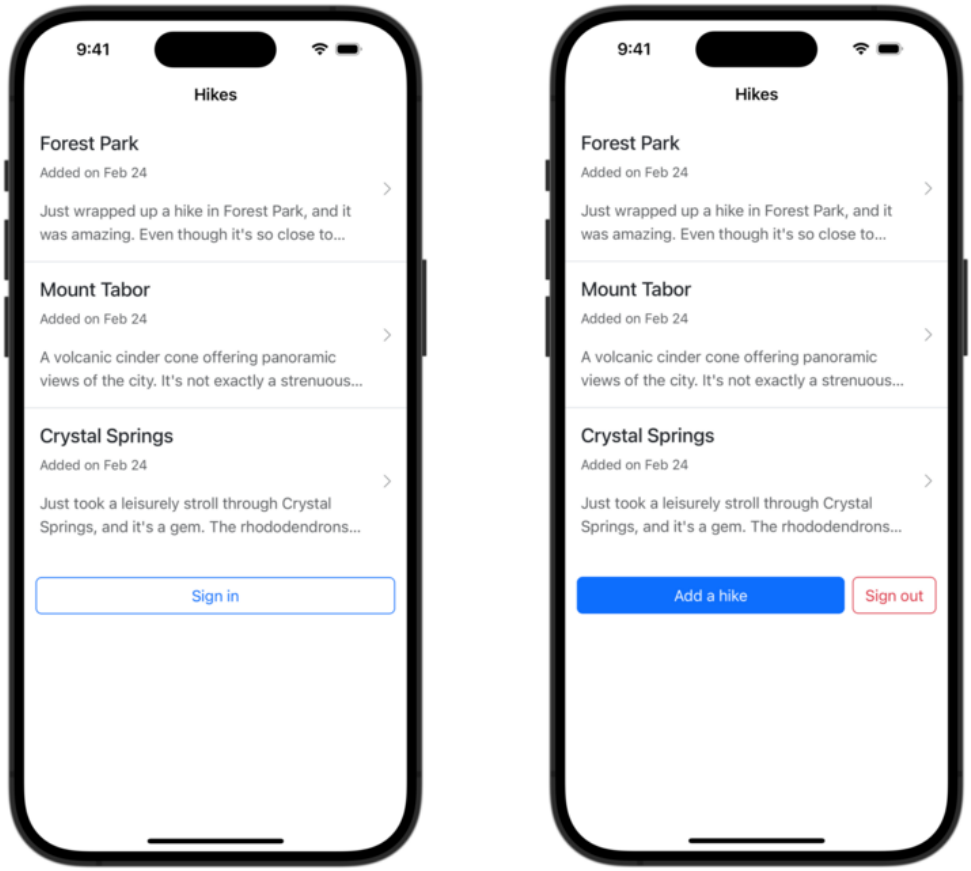


You've now learned two techniques to drive mobile app content from the server code: you're dynamically setting the native title and conditionally rendering HTML content. Before we move on to driving *behavior*, let's fix an innocent but impactful bug.