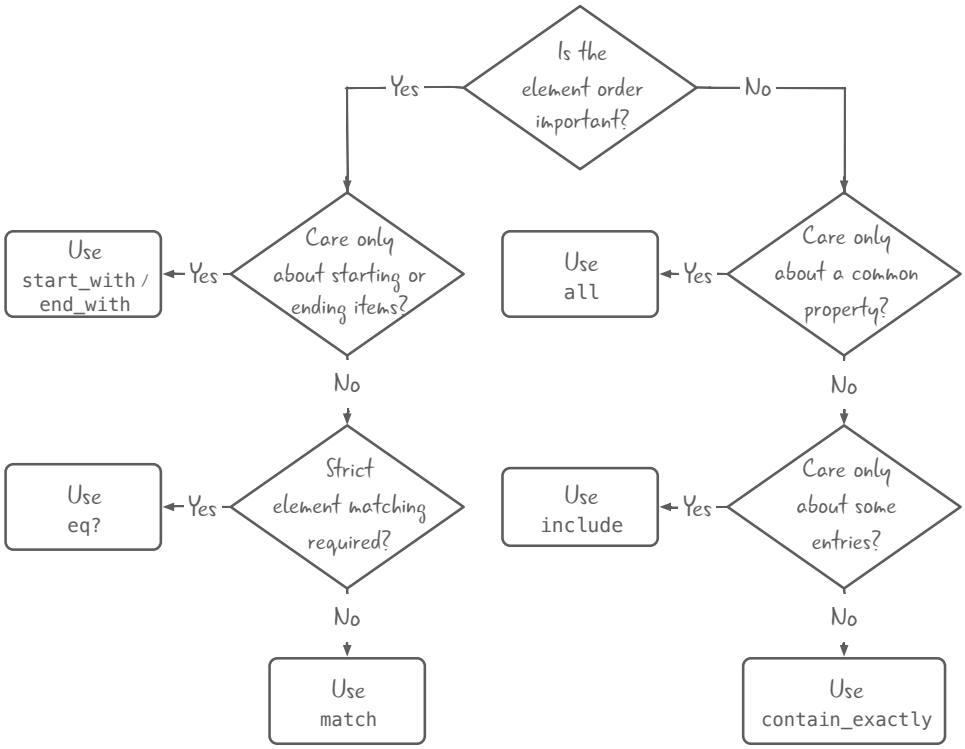


Object Attributes

Some Ruby objects act like fancier versions of hashes. Struct, OpenStruct, and ActiveRecord can all act like buckets for your data, which you read via attributes.

If you need to check an object's attributes against a template, you can use the have_attributes matcher:

11-matchers-included-in-rspec-expectations/02/higher_order_matchers.rb

```
require 'uri'
uri = URI('http://github.com/rspec/rspec')
expect(uri).to have_attributes(host: 'github.com', path: '/rspec/rspec')
```

This matcher is particularly useful as an argument to another matcher; the an_object_having_attributes form comes in handy here:

11-matchers-included-in-rspec-expectations/02/higher_order_matchers.rb

```
expect([uri]).to include(an_object_having_attributes(host: 'github.com'))
```

This comparison is more forgiving than exact equality. Your object can contain additional attributes beyond the ones you specify, and still satisfy the matcher.