
Let’s get the app set up. From here on out, all command lines will be happening inside the Docker container unless indicated otherwise.

```
> bin/setup
lots of output
```

That should’ve installed the needed gems and set up your database. Now run the app:

```
> bin/dev
```

The app is now running on port 4000 inside the container, which is mapped to port 4000 on your computer, so you should be able to go to http://localhost:4000 and see the app running. The home page, shown below, shows some basic status information about Postgres, Redis, and three fake services that our Sidekiq jobs will interact with.

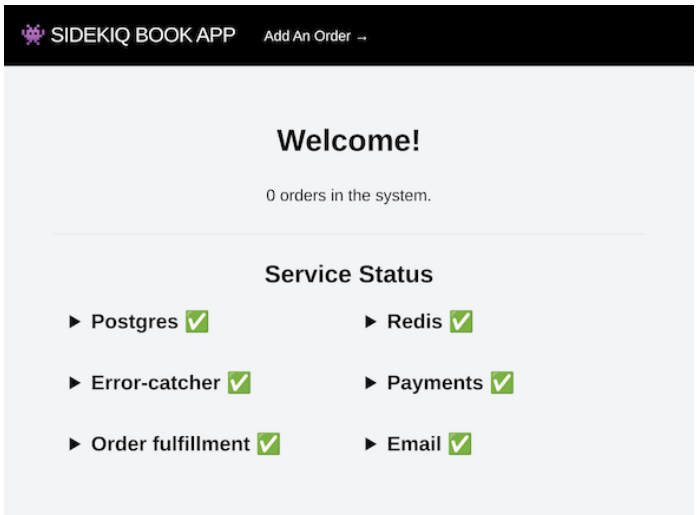

Screenshot of the welcome page of the example app that shows the status of Postgres, Redis, a Payments service, an Email service, and an Order fulfillment service.

Next, we’ll install and set up Sidekiq with a baseline configuration you can use for production.