
The result of this command can be seen in the following screenshot:

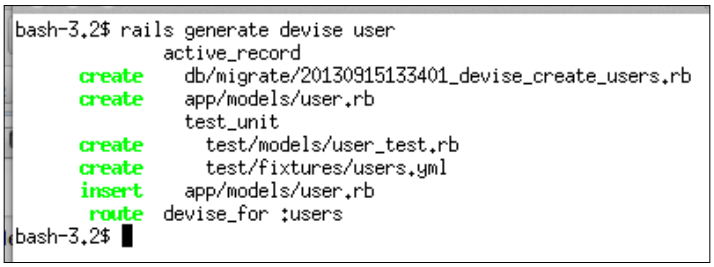

Generate Devise model

Based on the previous screenshot, Devise generates four kinds of files:

- The first kind is used as a migration file. This file is shown as `db/migrate/20130915133401_devise_create_users.rb`. Like the other migration files, it is used to generate tables in our database.
- A model file that is shown as `app/models/user.rb`.
- A test file that is shown as `test/models/user_test.rb`. This file is used to perform testing. We will discuss this topic in *Chapter 5*, *Testing Devise*.
- A fixture file that is shown as `test/fixtures/users.yml`. This file is used to perform testing. We will discuss this topic in *Chapter 5*, *Testing Devise*.

The command also modifies the model file to attach the default modules and the route file (`routes.rb`). Devise modifies the route so the application recognizes some routes generated by Devise. This is the code which is added by Devise to the route file:

```
devise_for :users
```

Now, let's open a user model file (`user.rb`) and you're going to see this code:

```
class User < ActiveRecord::Base
# Include default devise modules. Others available
# are:
# :token_authenticatable, :encryptable,
# :confirmable, :lockable, :timeoutable and
# :omniauthable
devise :database_authenticatable, :registerable,
:recoverable, :rememberable, :trackable,
:validatable

end
```


www.it-ebooks.info