The configuration for Mongoid is done; now, we are going to move to the Devise configuration. There is no difference in setting up Devise with Mongoid; the commands and steps that you need to perform are exactly the same with the ones that I've written in the previous chapter. But, there's one difference in the Devise configuration file. If you open `config/initializers/devise.rb`, usually you are going to see the `require 'devise/orm/active_record'` line inside it. But, if you use Devise with Mongoid, you are going to see that the code will be replaced with the following code:

```
require 'devise/orm/mongoid'
```


Let's say I generated a `user` Devise model and I also generated a `users` controller to see whether it's working or not. My controller will be like this:

```
class UsersController < ApplicationController
  before_filter :authenticate_user!
  def index
  end
end
```

These will be the codes for my view:

```
<h1>Users#index</h1>
<p>Find me in app/views/users/index.html.erb</p>
<%= link_to 'Sign Out', destroy_user_session_path, method: "delete" %>
```

When you go through `http://localhost:3000/users/indexhttp://localhost:3000/users/index`, you are going to be redirected to the following page:

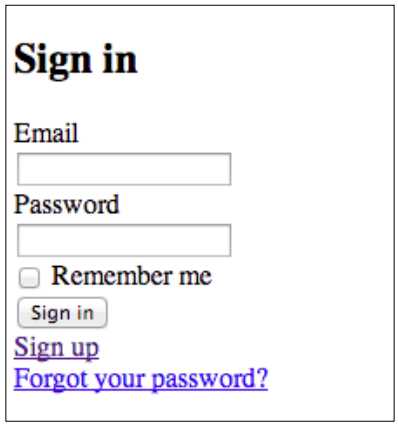

The Devise sign-in form with Mongoid

www.it-ebooks.info