the module *below* the including class (sometimes called the *includer*), rather than above it:

```
class C2
  prepend M2
end

class D2 < C2; end

D2.ancestors # => [D2, M2, C2, Object, Kernel, BasicObject]
```

Bill draws the following flowchart to show how include and prepend work.

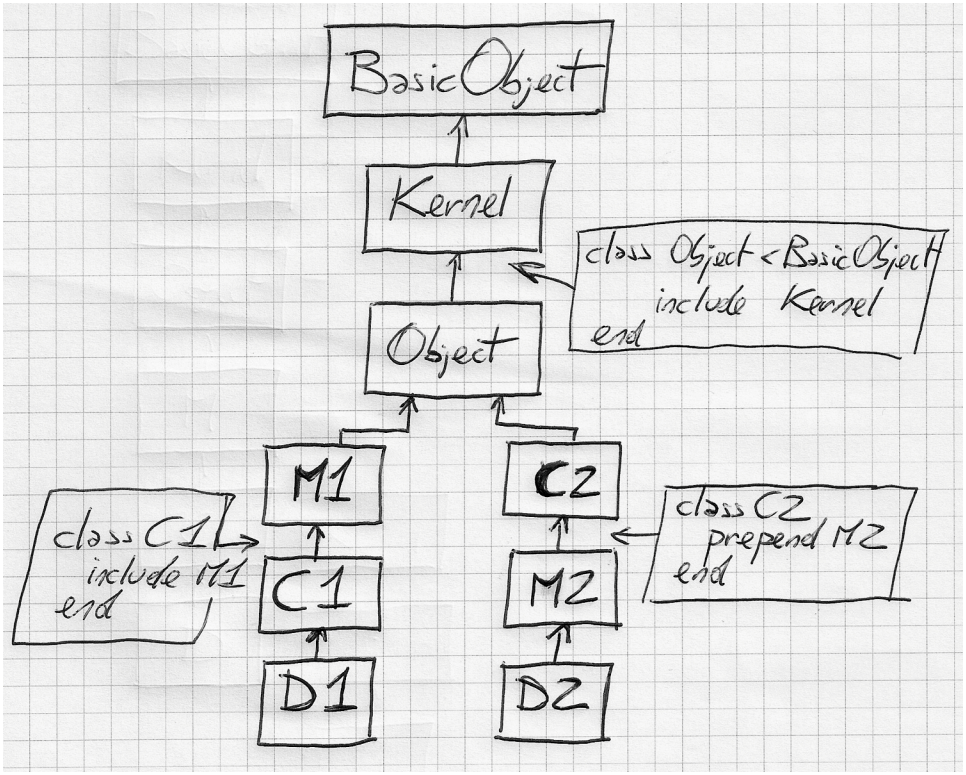


Figure 4—Method lookup with modules

Later in this book, you'll see how to use prepend to your advantage. For now, it's enough that you understand the previous diagram. There is one last corner case about include and prepend, however—one that is worth mentioning right away.