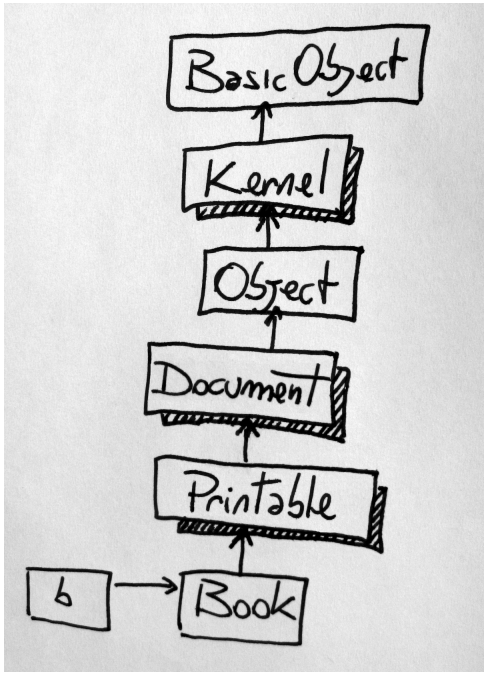


Figure 5—The ancestors chain of the Book class

includes Printable. Again, Ruby slips Printable in the chain right above Book, pushing up the rest of the chain—from Document upward.

When you call b.print_to_screen, the object referenced by b becomes self, and method lookup begins. Ruby finds the print_to_screen method in Document, and that method then calls other methods—including print. All methods called without an explicit receiver are called on self, so method lookup starts once again from Book (self's class) and goes up until it finds a method named print. The lowest print in the chain is Printable#print, so that's the one that gets called.

The bug report hints that the original author of the code intended to call Document#print instead. In real production code, you'd probably want to get rid of this confusion and rename one of the clashing print methods. However, if you just want to solve this quiz, the cheapest way to do it is to swap the order of inclusion of the modules in Book so that Document gets lower than Printable in the ancestors chain:

object_model/tangle_untwisted.rb
```
module Printable
  # ...
end
```