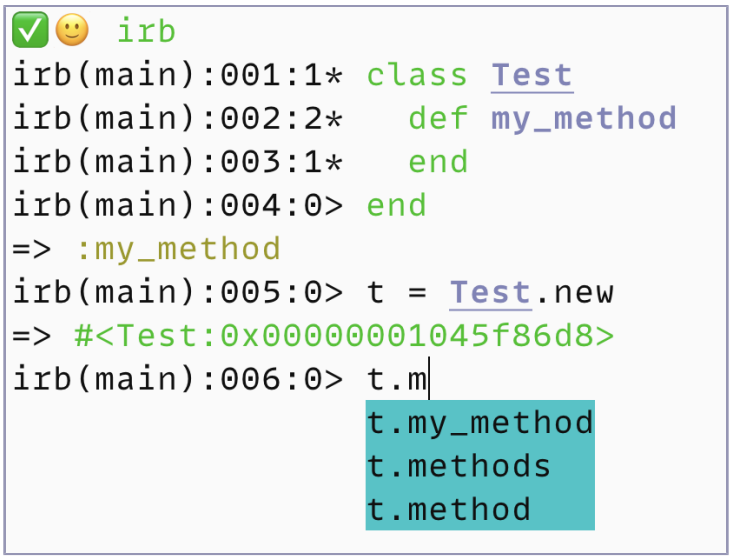


In this example, my_method is included in the autocomplete for the new object in the defined class.

Subsessions

irb supports multiple concurrent sessions. One is always current; the others lie dormant until activated. Entering the command irb within irb creates a subsession, entering the jobs command lists all sessions, and entering fg activates a particular dormant session. This example also illustrates the -r command-line option, which loads in the given file before irb starts:

```
$ irb -r ./code/irb/fibonacci_sequence.rb
irb(main):001:0> result = fibonacci_sequence.first(5)
=> [1, 1, 2, 3, 5]
irb(main):002:0> # Creating nested irb session
=> nil
irb(main):003:0> irb
irb#1(main):001:0> result = %w[cat dog elk]
=> ["cat", "dog", "elk"]
irb#1(main):002:0> result.map(&:upcase)
=> ["CAT", "DOG", "ELK"]
irb#1(main):003:0> jobs
=>
#0->irb on main (#<Thread:0x00000001025e4d60 sleep_forever>: stop)
#1->irb#1 on main (#<Thread:0x000000010656caf0
/Users/noel/.rbenv/versions/3.1.2/lib/ruby/3.1.0/irb/ext/multi-irb.rb:192
run>: running)
irb#1(main):004:0> fg 0
=> #<IRB::Irb: @context=#<IRB::Context:0x00000001064ed9d0>,
   @signal_status=:IN_EVAL, @scanner=#<RubyLex:0x000000010659e370>>
irb(main):004:0> result
=> [1, 1, 2, 3, 5]
```