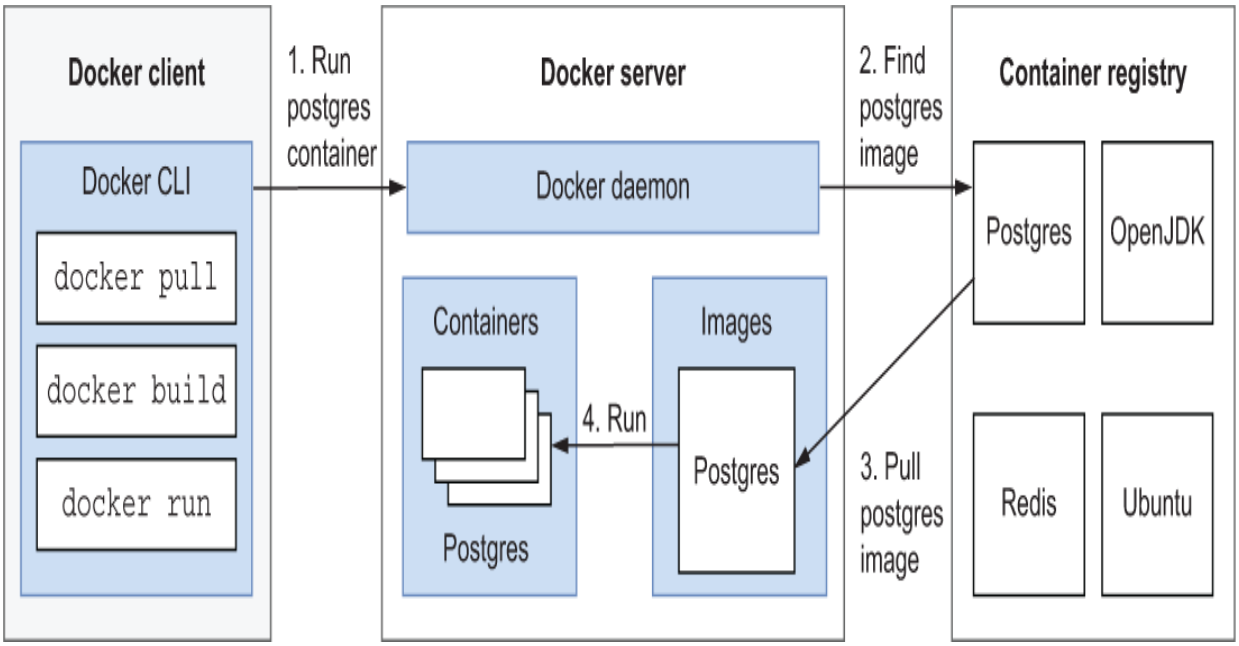


Figure 2.7 The Docker Engine has a client/server architecture, and it interacts with a registry.

The Docker daemon manages different objects. For now we'll focus on images and containers.

A *container image* (or, simply, an *image*) is a lightweight executable package that includes everything needed to run the application inside. The *Docker image* format is the most used one for creating container images, and it has been standardized by the OCI project (in the OCI Image Specification). OCI images can be created from scratch by defining instructions in a `Dockerfile`, a text-based file containing all the steps to generate the image. Usually, images are created based on another image. For example, you might build an image based on the OpenJDK one, on top of which you can add a Java application. After it's created, the image can be pushed to a container registry like Docker Hub. A base name and a tag identify each image, where the tag is usually the version number. For