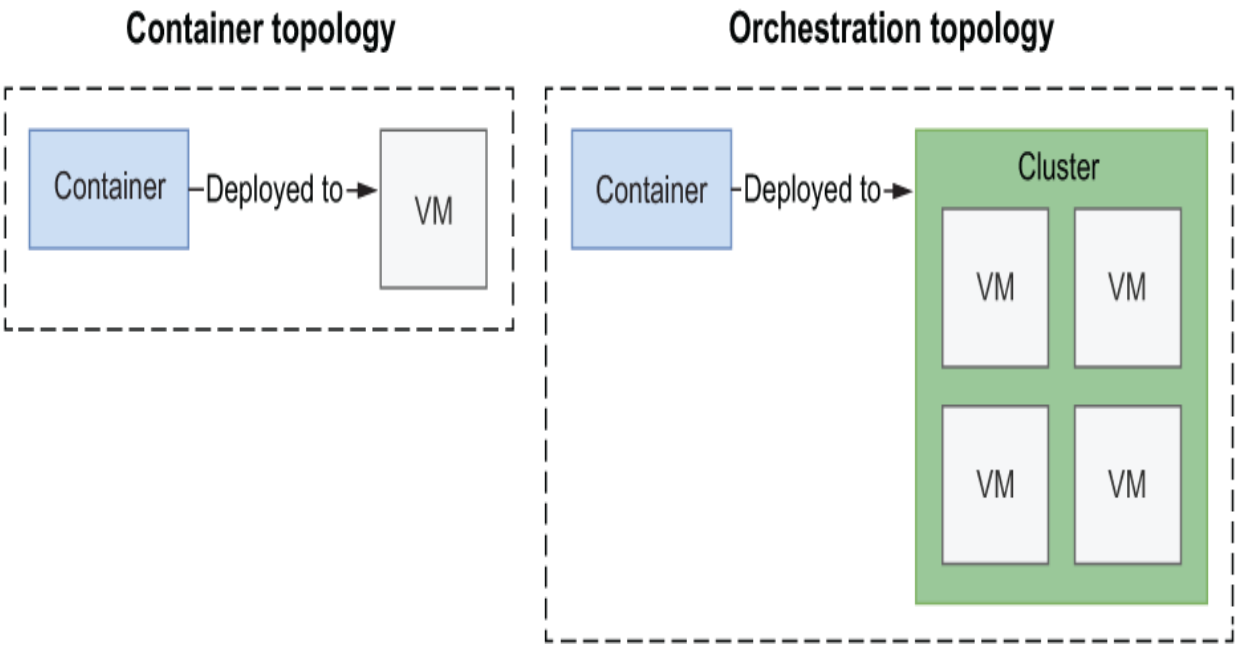


Figure 2.9 The deployment target of containers is a machine, whereas for orchestrators it's a cluster.

Before moving on, follow the instructions in section A.3 of appendix A to install minikube and set up a Kubernetes cluster in your local development environment. Once you are done with the installation procedure, you can start a local Kubernetes cluster with the following command:

```
$ minikube start
```

2.4.1 Introducing Kubernetes: Deployments, Pods, and Services

Kubernetes is an open source container orchestrator hosted by the CNCF. In just a few years, it has become the most used solution for container orchestration, and all the major cloud providers have offerings for Kubernetes as a service. Kubernetes can run on a desktop, on a data center on premises, in the cloud, and even on an IoT device.