By default, applications running in Kubernetes are not accessible. Let’s fix that. First, you can expose Catalog Service to the cluster through a Service resource by running the following command:

```
$ kubectl expose deployment catalog-service \
    --name=catalog-service \
    --port=8080
```

Figure 2.12 provides a description of the command.

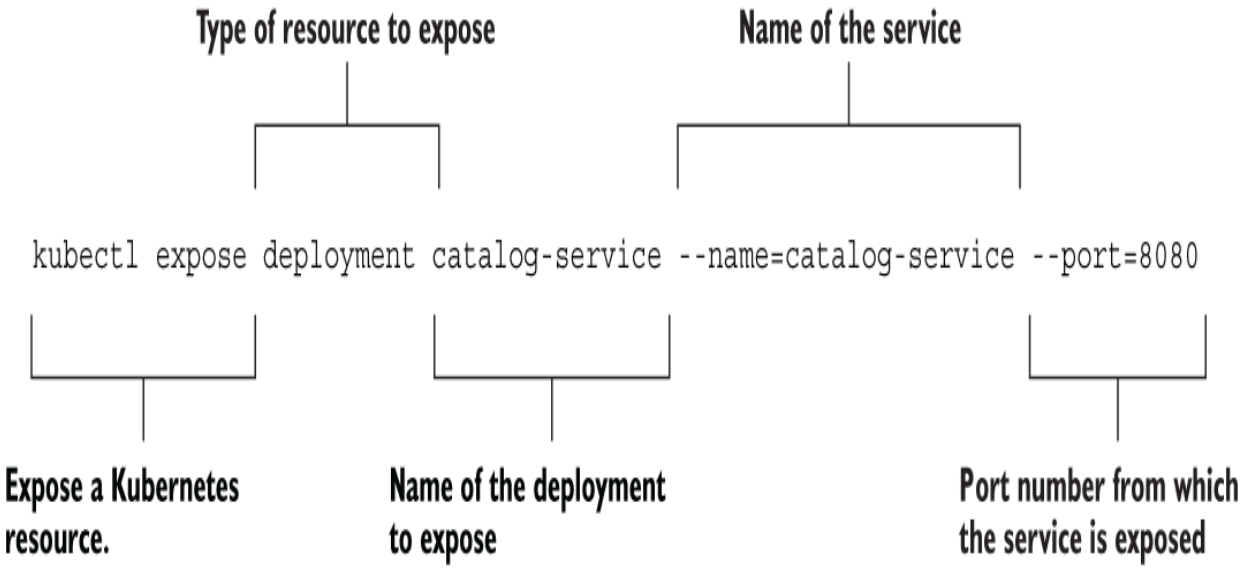


Figure 2.12 The Kubernetes command to expose a Deployment as a Service. The Catalog Service application will be exposed to the cluster network through port 8080.

The Service object exposes the application to other components inside the cluster. You can verify that it’s been created correctly with the following command:

```
$ kubectl get service catalog-service
NAME              TYPE        CLUSTER-IP      EXTERNAL-IP   PORT(S)    AGE
catalog-service   ClusterIP   10.96.141.159   <none>        8080/TCP   7s
```