A cloud native application should consist of a single codebase tracked in a version control system like Git. Each codebase must produce immutable artifacts, called *builds*, that can be deployed to multiple environments. Figure 3.1 shows the relationship between codebase, build, and deployments.

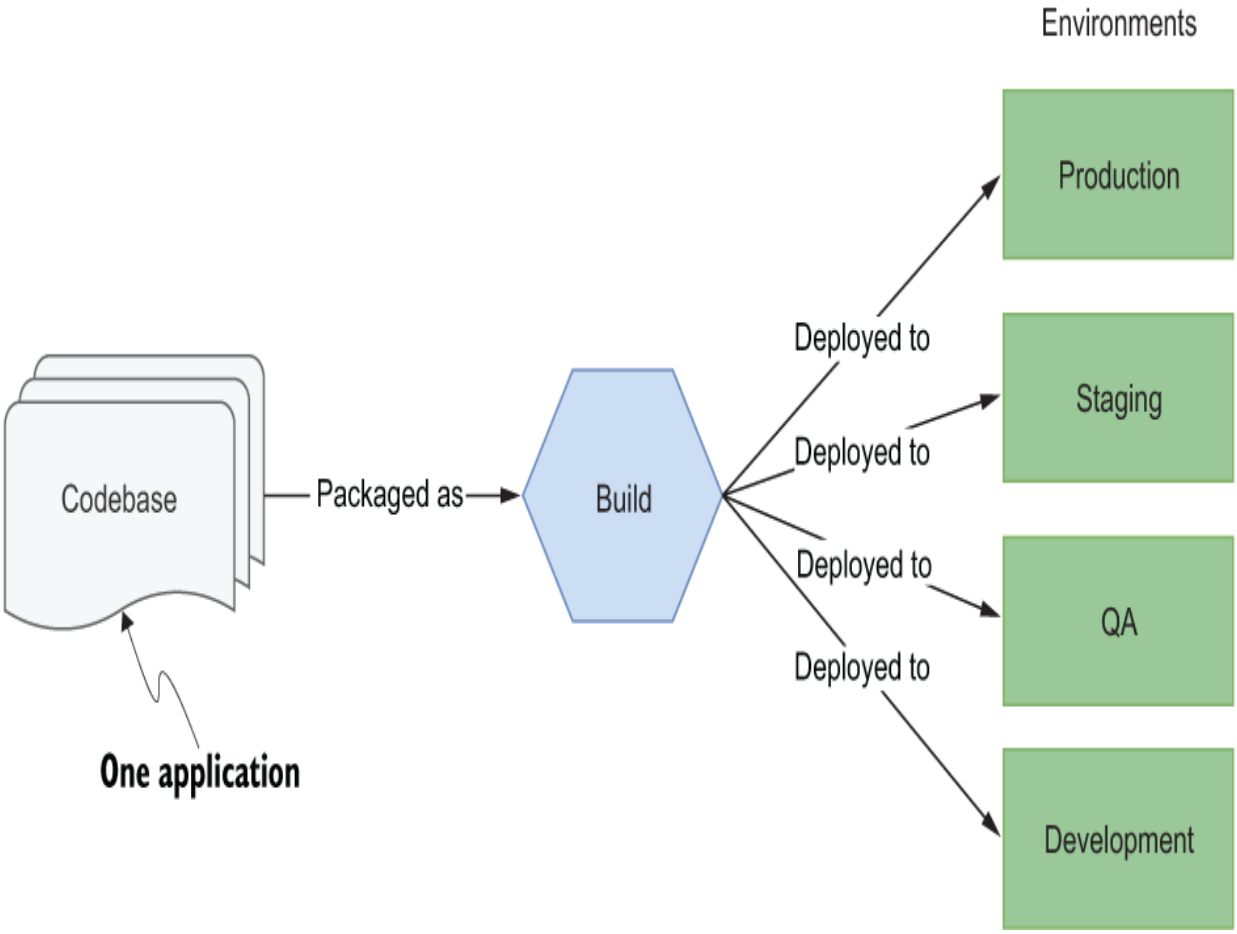


Figure 3.1 Each application has its codebase, from which immutable builds are produced and then deployed to the appropriate environments without changes to the code.

As you'll see in the next chapter, anything environment-specific like configuration must be outside of the application codebase. In case of code that's needed by more than one application, you should either turn it into an