```
  }
}
```

❶ The framework takes care of assigning a value for the identifier and the version under the hood.

I'll leave it to you to update the autotests similarly. You can also extend the tests in the `BookJsonTests` class to verify the serialization and deserialization of the new fields. As a reference, you can check Chapter05/05-intermediate/catalog-service in the code repository accompanying this book.

As a persistent entity, the `Book` record will be automatically mapped to relational resources. Class and field names are transformed into lowercase, and the camel case is translated into words joined by underscores. The `Book` record will result in the `book` table, the `title` field will result in the `title` column, the `price` field will result in the `price` column, and so on. Figure 5.5 shows the mapping between the Java object and the relational table.

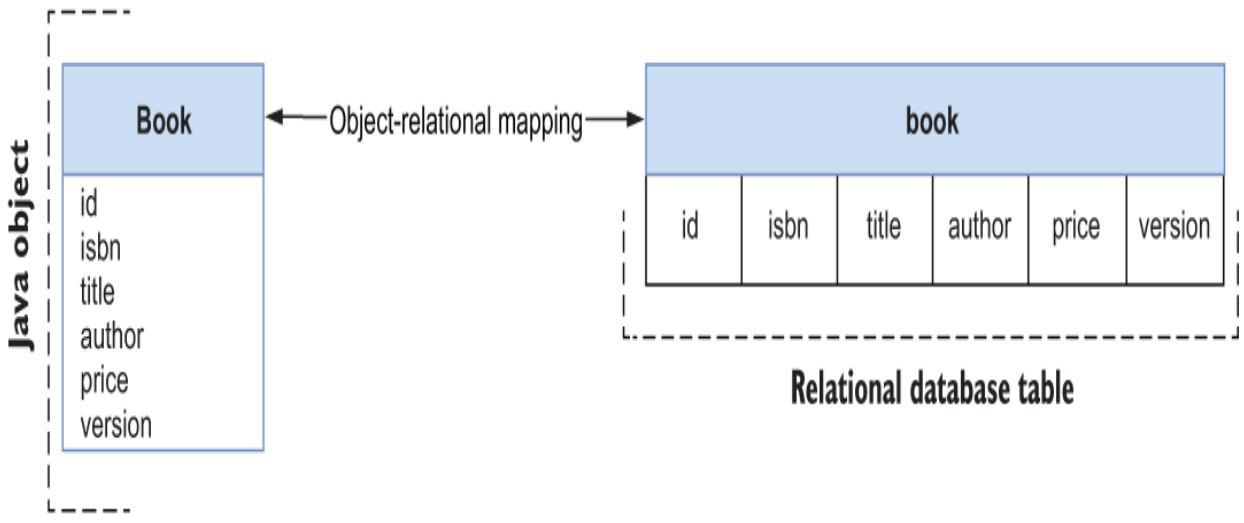


Figure 5.5 Java classes marked as persistent entities are automatically mapped by Spring Data JDBC to relational resources in the database.