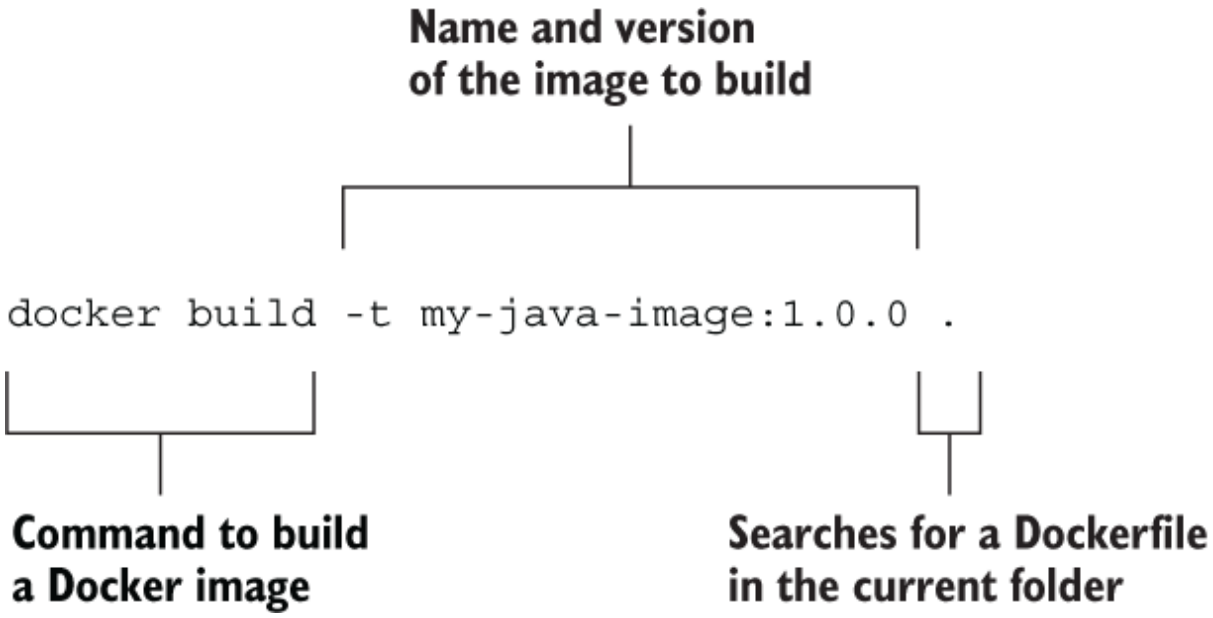


Figure 6.5 The Docker CLI command to build a new image with a given name and version

When it's done, you can get some details about your newly created image using the `docker images` command:

```
$ docker images my-java-image
REPOSITORY      TAG       IMAGE ID       CREATED         SIZE
my-java-image   1.0.0     96d1f58857aa   6 seconds ago   549MB
```

The layered approach makes the image build very performant. Each image layer is a delta from the previous one, and Docker caches all of them. If you make changes to only one of them and build the image again, only that layer and the subsequent ones are recreated. If you run a container from a new version of an image stored in a registry, only the new layers will be downloaded, improving performance at runtime.

For that reason, it's recommended that you order layers based on their likelihood to change, optimizing the image build process. Place the instructions that change more often toward the end of the Dockerfile.