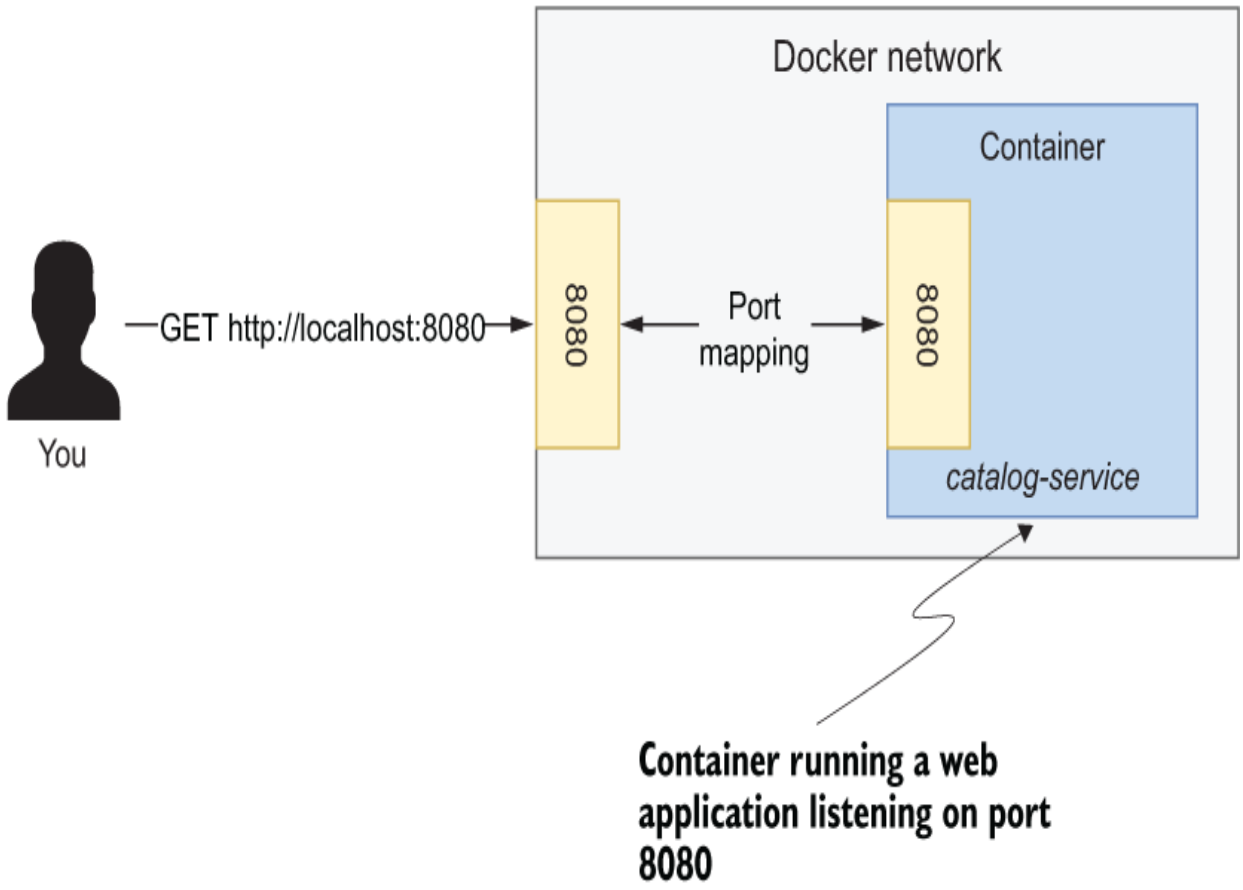


Figure 6.8 Port mapping lets you access the services exposed by a containerized application by forwarding the traffic from the container network to the outside world.

USING DOCKER'S BUILT-IN DNS SERVER FOR SERVICE DISCOVERY

Thanks to port forwarding, the Catalog Service application in the previous chapter could access the PostgreSQL database server through the URL `jdbc:postgresql://localhost:5432`, even if it was running inside a container. The interaction is shown in figure 6.9. When running Catalog Service as a container, however, you will not be able to do