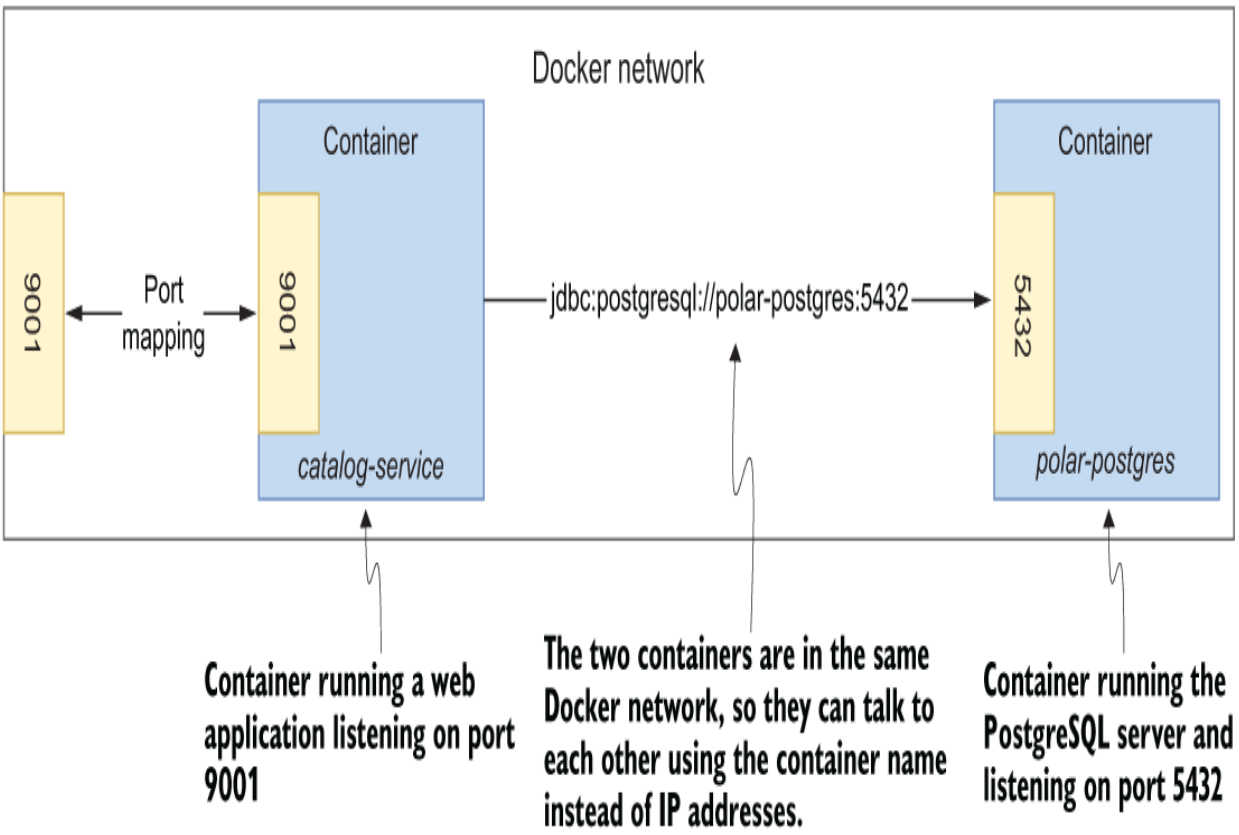


Figure 6.10 The Catalog Service container can directly interact with the PostgreSQL container because they are both on the same Docker network.

So before moving on, let's create a network inside which Catalog Service and PostgreSQL can talk to each other using the container name instead of an IP address or a hostname. You can run this command from any Terminal window:

```
$ docker network create catalog-network
```

Next, verify that the network has been successfully created:

```
$ docker network ls
NETWORK ID     NAME              DRIVER    SCOPE
178c7a048fa9   catalog-network   bridge    local
...
```