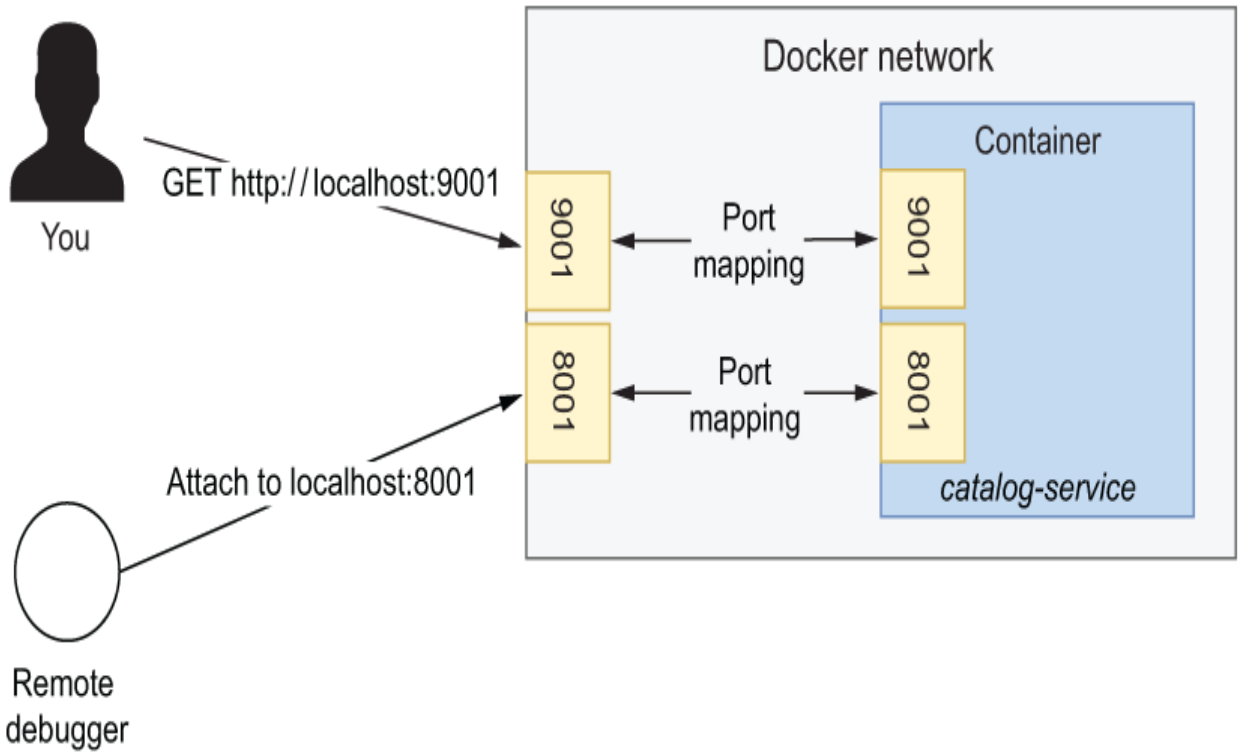


Figure 6.13 From a container, you can expose as many ports as you want. For Catalog Service, expose both the server port and the debug port.

Next, update your docker-compose.yml file to configure the Catalog Service application for debugging.

Listing 6.8 Configuring Catalog Service to run in debug mode

```
version: "3.8"
services:

  catalog-service:
    depends_on:
      - polar-postgres
    image: "catalog-service"
    container_name: "catalog-service"
    ports:
      - 9001:9001
      - 8001:8001                          ❶
    environment:
      - BPL_JVM_THREAD_COUNT=50
```