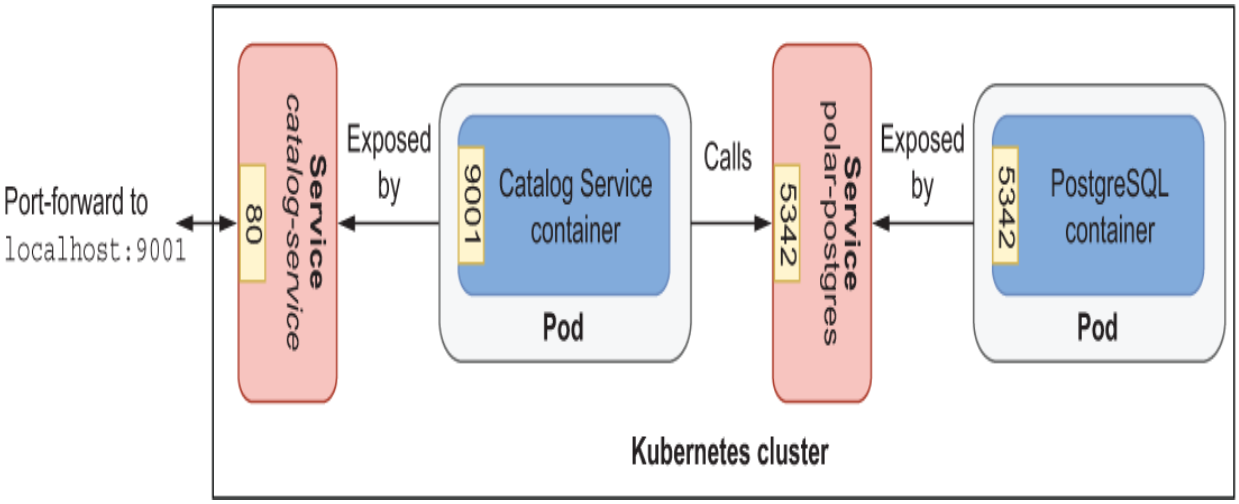


Figure 7.11 The Catalog Service application is exposed to your local machine through port forwarding. Both Catalog Service and PostgreSQL are exposed to the inside of the cluster through the cluster-local hostname, IP address, and port assigned to the Service objects.

So far we've been working with only one instance of Catalog Service, but we can take advantage of Kubernetes and scale it out. The following section will cover how to scale Spring Boot applications and address aspects such as fast startup and graceful shutdown, which are essential for cloud native applications.

NOTE Imagine running all those commands every time you change something in your application, and you want to test it locally. It doesn't look very appealing, does it? Don't worry! In section 7.5 I'll show you how to set up a local Kubernetes development workflow to automate all those operations.

7.4 Scalability and disposability

Deploying multiple instances of the same application helps in achieving high availability. When the workload is high, it can be distributed across different replicas. When an instance enters a faulty state and can't process requests anymore, it can be deleted and a new one created. This continuous and