applications in Spring is to use only one thread per CPU core. With the non-blocking I/O capability and a communication paradigm based on events, reactive applications allow for more efficient utilization of computational resources. Figure 8.2 shows how it works.

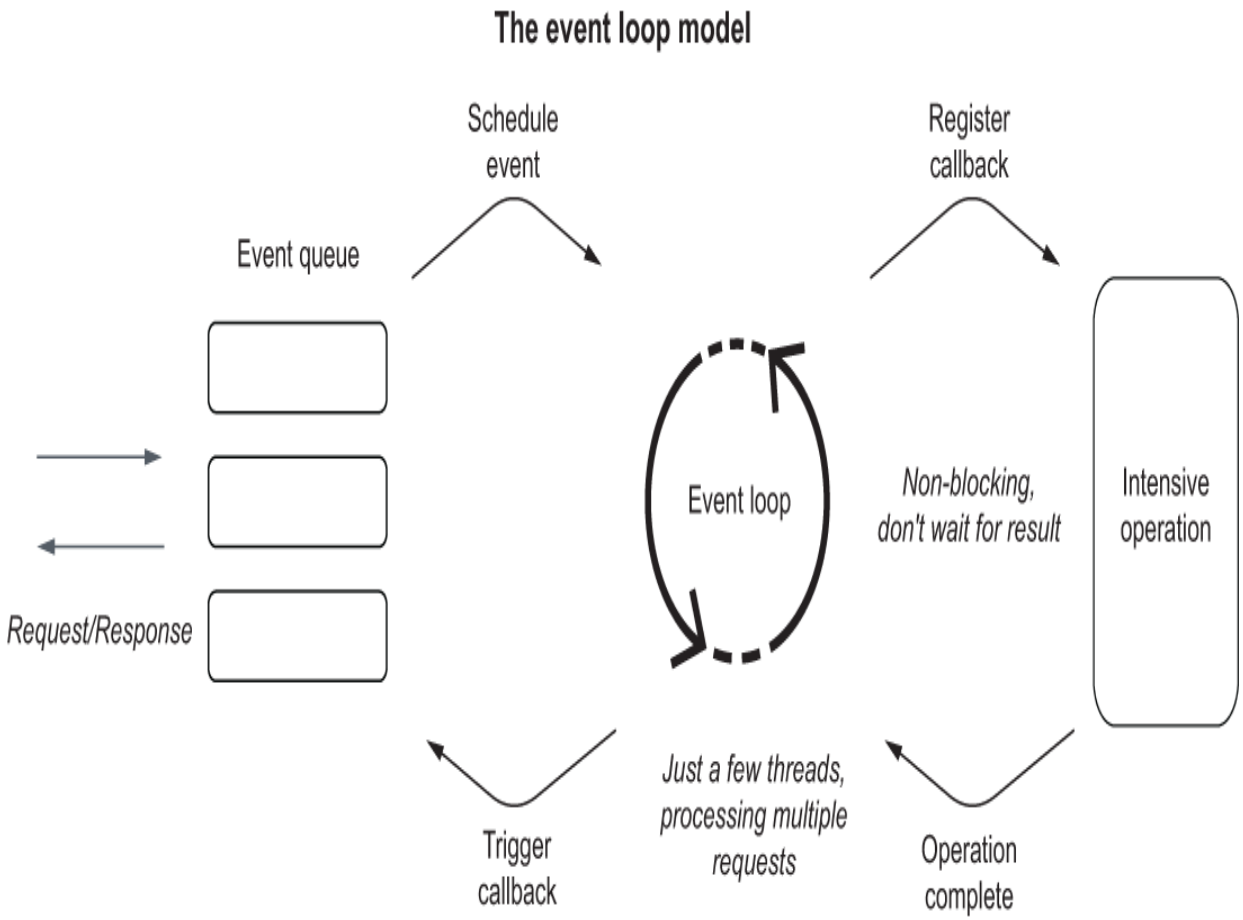


Figure 8.2 In the event loop model, requests are handled by threads that don’t block while waiting for an intensive operation, allowing them to process other requests in the meantime.

I wanted to briefly mention the difference between those two paradigms because it helps explain the reasoning behind reactive programming. However, you don’t need to know the details of these paradigms’ inner mechanics since we won’t have to work at such a low level or implement an