while the reactive stack uses Spring WebFlux. Figure 8.3 compares the two stacks. (For a broader overview, you can refer to https://spring.io/reactive.)

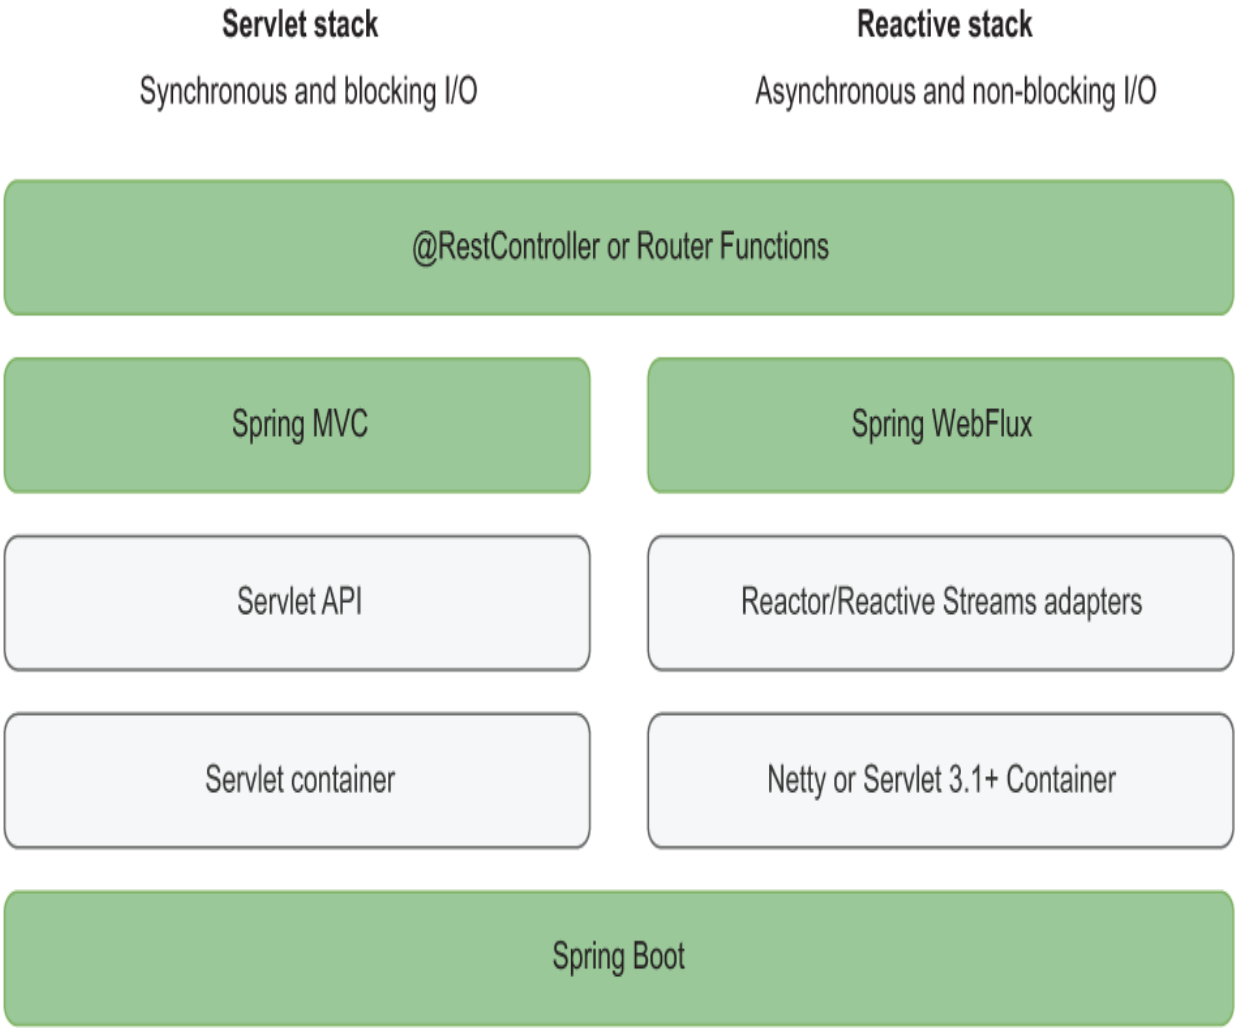


Figure 8.3 The servlet stack is based on the Servlet API and supports synchronous and blocking operations. The reactive stack is based on Project Reactor and supports asynchronous and non-blocking operations.

Tomcat is the default choice for servlet-based applications like Catalog Service. Netty is the preferred choice for reactive applications, providing the best performance.