NOTE When deploying the system with Docker Compose or Kubernetes, you can override the property value via an environment variable, taking advantage of the service discovery features offered by the two platforms.

In the next section, you'll use the value configured through this property to call the Catalog Service from Order Service.

8.3.2 Understanding how to exchange data

Whenever a user submits an order for a specific book, Order Service needs to call Catalog Service to check the requested book's availability and fetch its details, like the title, author, and price. The interaction (HTTP request/response) is illustrated in figure 8.6.

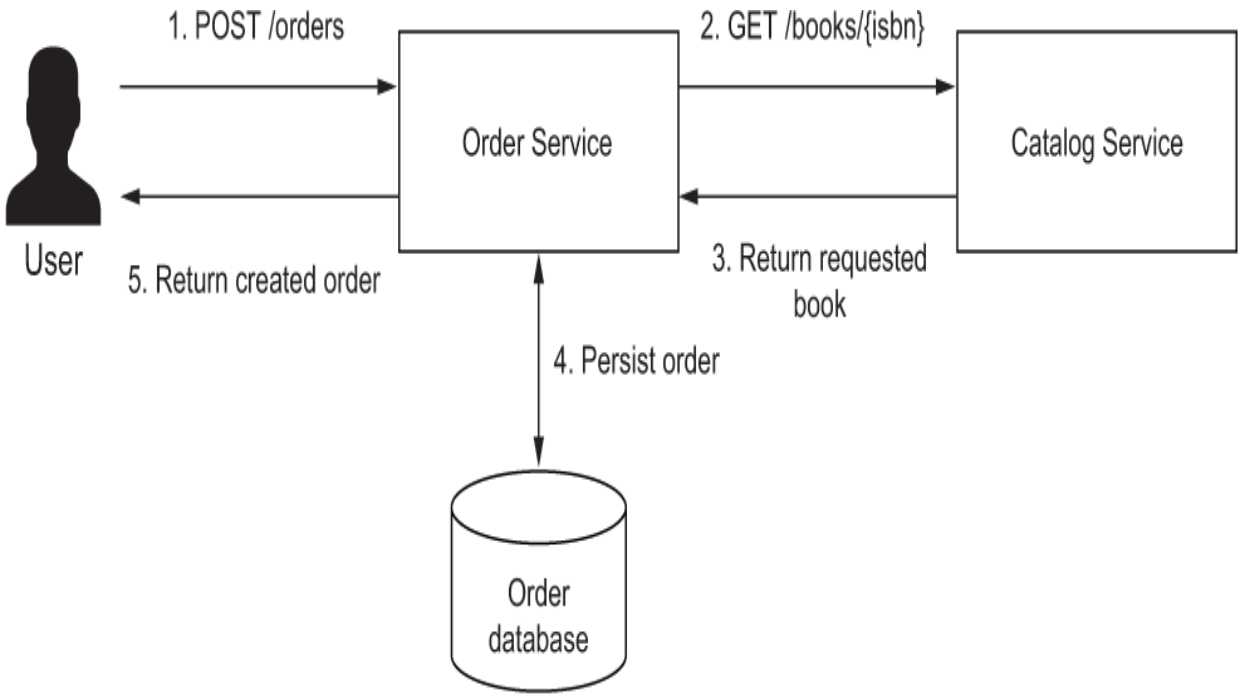


Figure 8.6 When an order is submitted, Order Service calls Catalog Service over HTTP to check the book's availability and fetch its details.