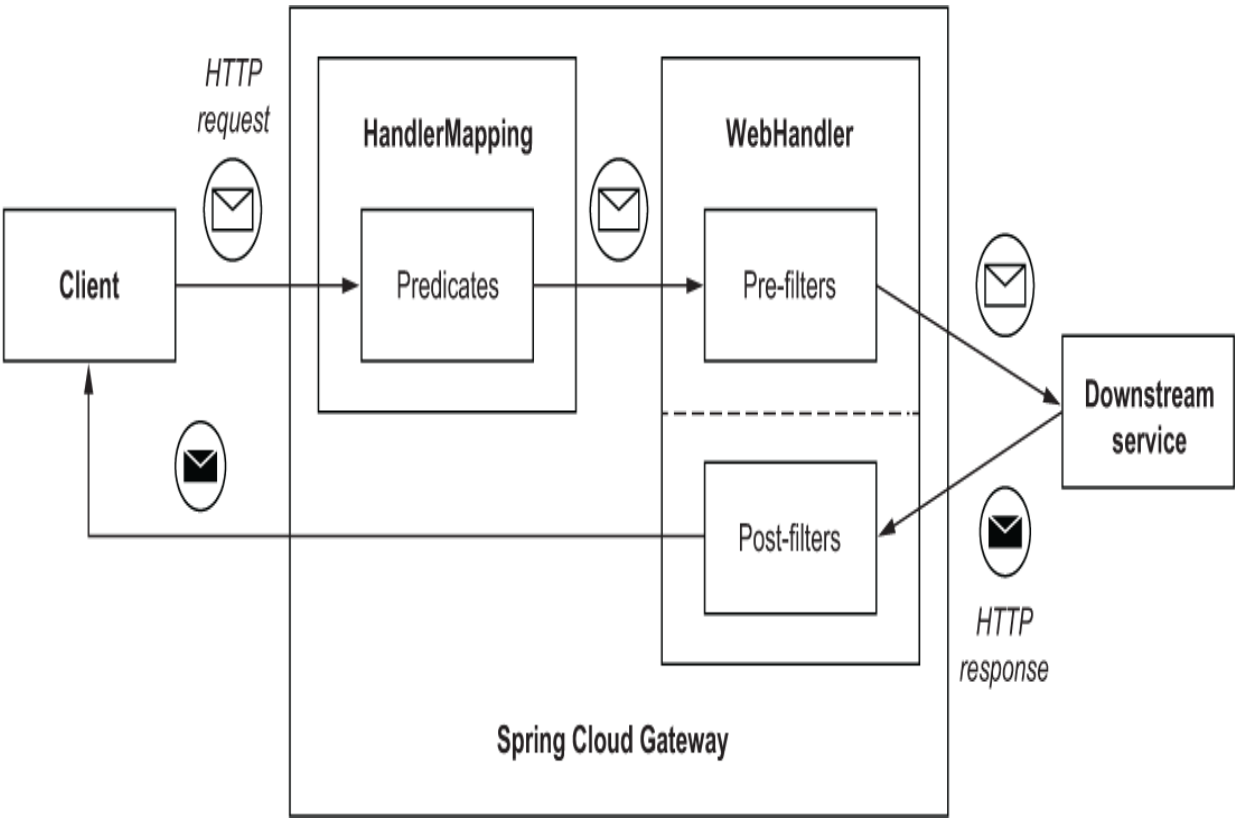


Figure 9.3 Requests are matched against predicates, filtered, and finally forwarded to the downstream service, which replies with a response that goes through another set of filters before being returned to the client.

In the Polar Bookshop system, we have built two applications with APIs that are meant to be accessible from the outside world (public APIs): Catalog Service and Order Service. We can use Edge Service to hide them behind an API gateway. For starters, we need to define the routes.

A minimal route must be configured with a unique ID, a URI where the request should be forwarded, and at least one predicate. Open the application.yml file for the Edge Service project, and configure two routes to Catalog Service and Order Service.

Listing 9.2 Configuring routes to downstream services