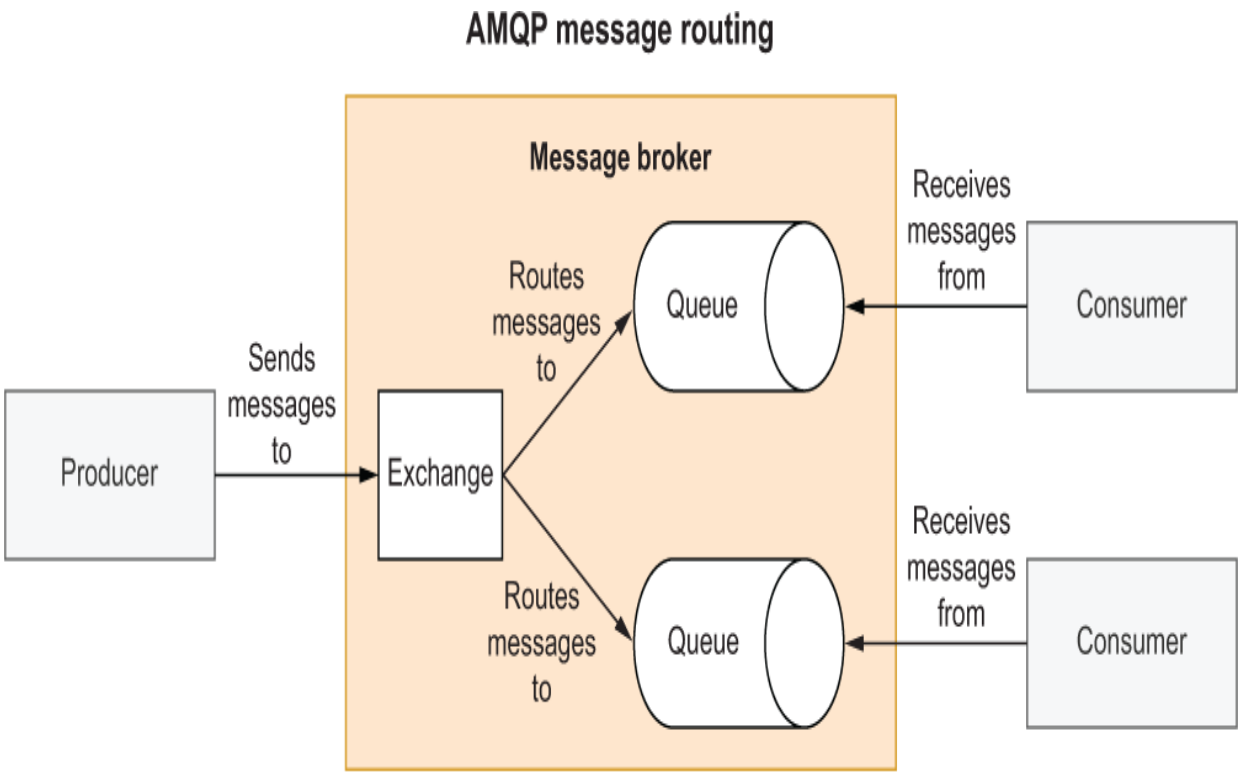


Figure 10.4 Producers publish messages to an exchange. Consumers subscribe to queues. Exchanges route messages to queues according to a routing algorithm.

The protocol establishes that a message comprises attributes and a payload, as shown in figure 10.5. AMQP defines some attributes, but you can add your own to pass the information that's needed to route the message correctly. The payload must be of a binary type and has no constraints besides that.