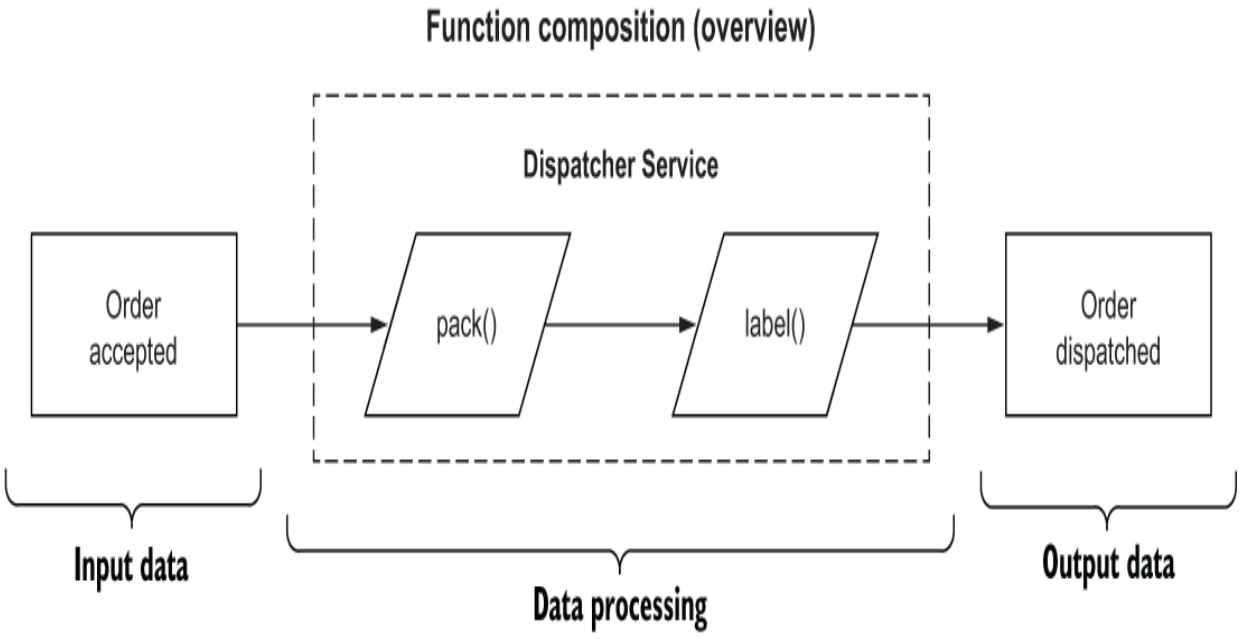


Figure 10.6 The business logic for Dispatcher Service is implemented as a composition of two functions: pack and label.

Let's see how we can implement these functions and what Spring Cloud Function brings to the table.

INITIALIZING A SPRING CLOUD FUNCTION PROJECT

You can initialize the Dispatcher Service project from Spring Initializr (https://start.spring.io) and store the result in a new `dispatcher-service` Git repository. The parameters for the initialization are shown in figure 10.7.