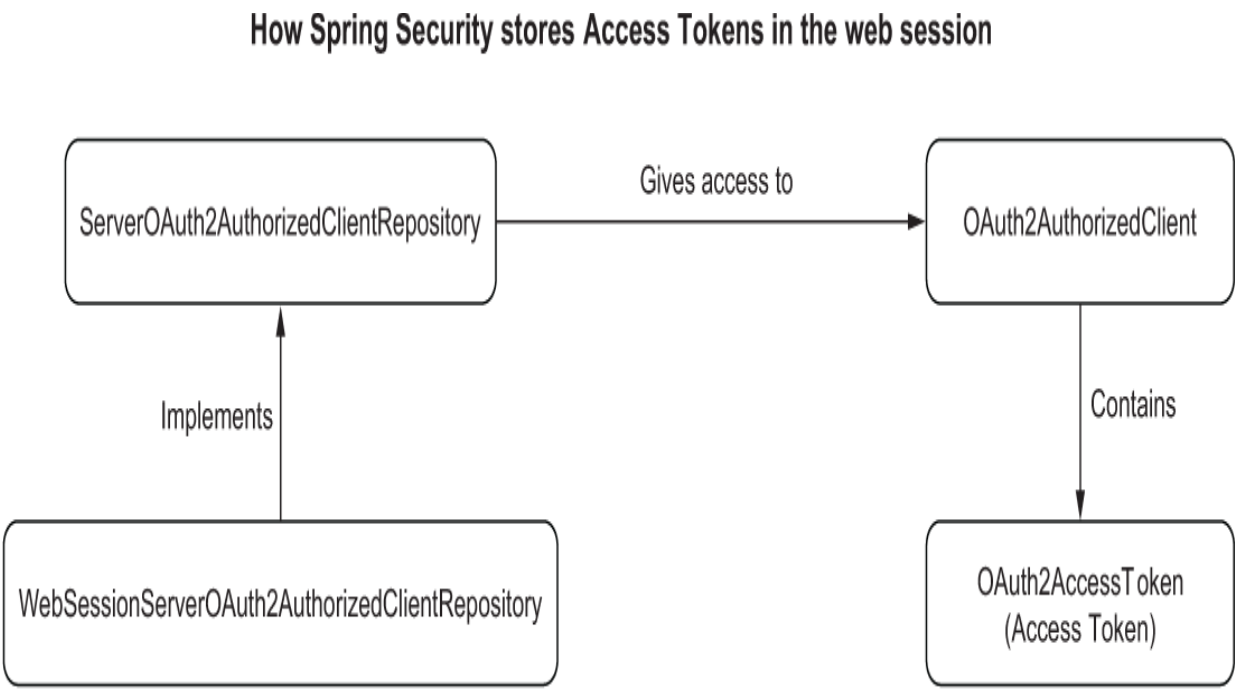


Figure 12.3 The main classes involved in storing an Access Token for the currently authenticated user in Spring Security

In the Edge Service project, open the `SecurityConfig` class and define a bean of type `ServerOAuth2AuthorizedClientRepository` using the implementation that stores Access Tokens in the web session.

Listing 12.2 Saving `OAuth2AuthorizedClient` objects in the web session

```
@EnableWebFluxSecurity
public class SecurityConfig {

  @Bean                                          ❶
  ServerOAuth2AuthorizedClientRepository authorizedClientRepository() {
    return new WebSessionServerOAuth2AuthorizedClientRepository();
  }

  ...
}
```

❶ Defines a repository to store Access Tokens in the web session