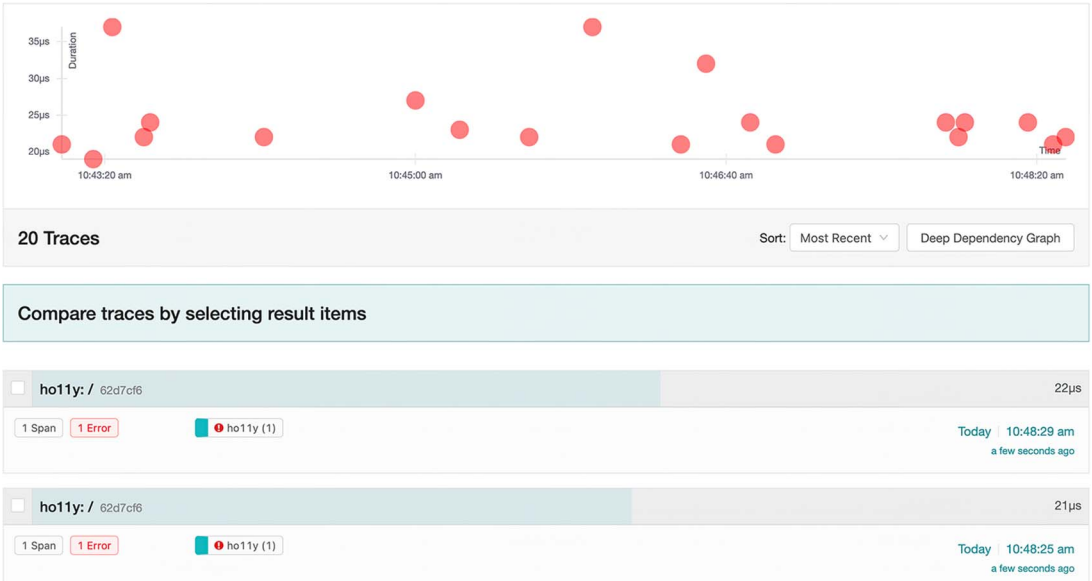


Figure 4.9 The Jaeger UI in action, showing `ho11y` traces filtered by HTTP 403 status code

Keep in mind that looking at an individual trace in Jaeger is as simple as clicking it in the right-hand list of traces, so go ahead and pick a random one. This should lead you to a view that resembles what figure 4.10 shows.

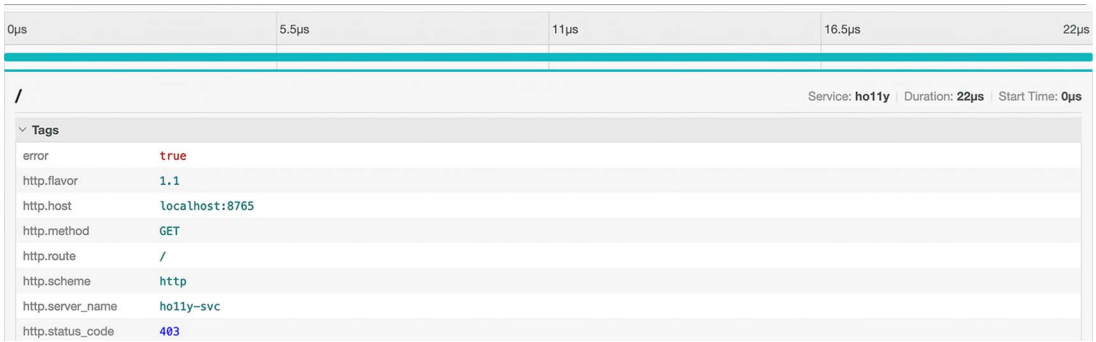


Figure 4.10 Drilling into a specific trace in Jaeger, showing all the available details

To sum it all up, in this OpenTelemetry in action walk-through, we have

1. Generated traces and metrics via manual instrumentation.
2. Configured the OpenTelemetry collector to collect these signals and ingest them into two different backend destinations (Jaeger, for traces, and Prometheus, for metrics).