```
exporters:
  jaeger:                          <-- The Jaeger exporter configuration
    endpoint: jaeger:14250             (we don't do TLS, so it is
    tls:                               configured insecure)
      insecure: true
service:
  pipelines:
    traces:                        <-- The traces pipeline, using the
      receivers: [ otlp ]              OTLP receiver and Jaeger exporter
      processors: [ batch ]
      exporters: [ logging, jaeger ]
```

Now, it's time for a `docker-compose up`, and if you now open up http://localhost:16686/ in your browser of choice, you should see something like what is shown in figure 6.6 (in the left-hand side form) if you've first set the Service dropdown to Frontend and entered `http.status_code=404` into the input field labeled Tags.

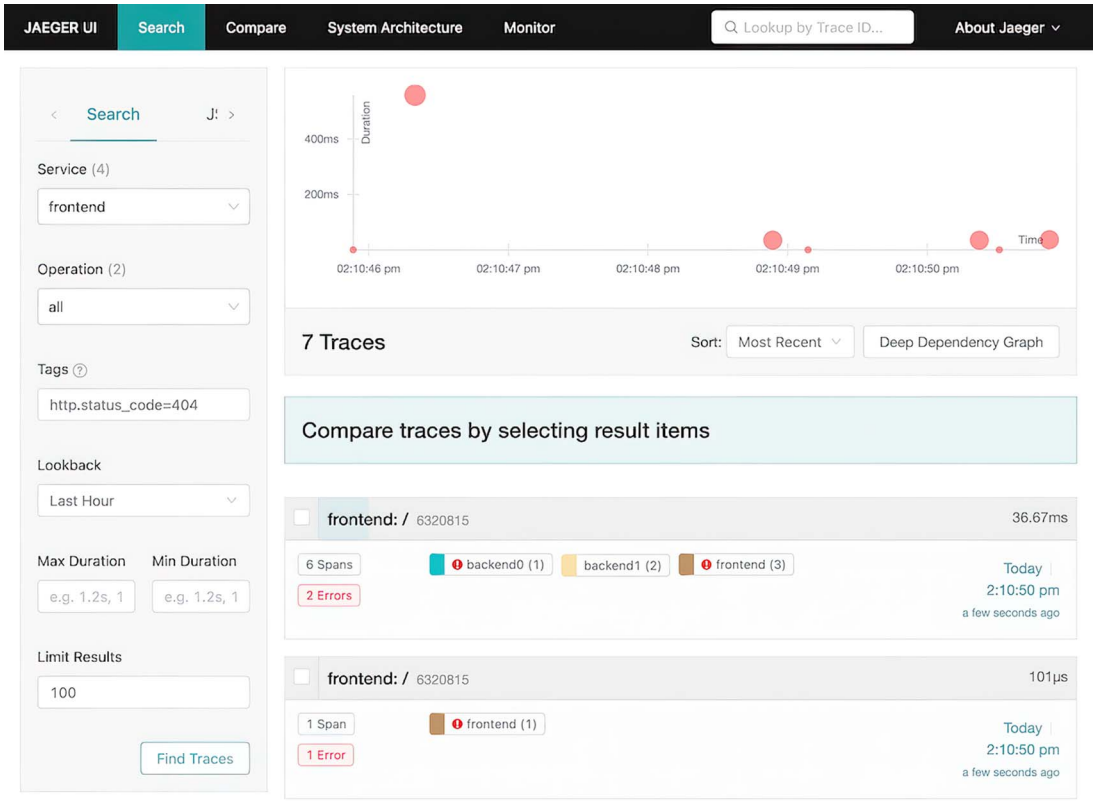


Figure 6.6 Jaeger UI showing all traces for a certain tag (`http.status_code=404`)

Getting an overview of all the traces is useful, but usually, you want to drill down and understand what is going on in the context of a request end to end. To do that, you