interested in diving deeper, check out the OpenTelemetry docs that discuss the demo architecture (https://opentelemetry.io/docs/demo/architecture/).

Figure A.1 shows the telemetry flow in the OpenTelemetry demo.

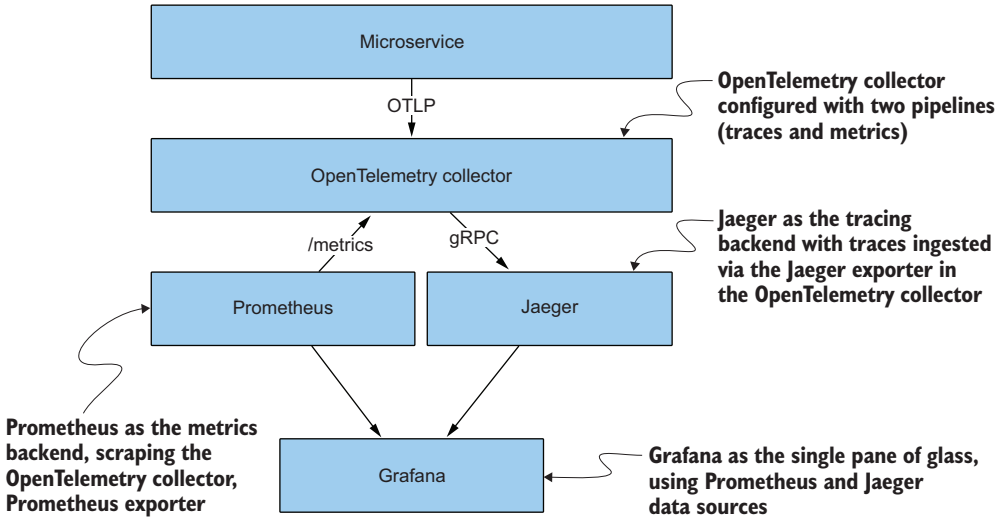


Figure A.1 OpenTelemetry demo telemetry flow

The relevant bits in the telemetry flow are

- *Microservices*—Instrumented to send telemetry data to the OpenTelemetry collector, using OTLP
- *The OpenTelemetry collector*—Has two pipelines configured (see listing A.1)
- *Prometheus*—The metrics backend
- *Jaeger*—The tracing backend
- *Grafana*—The single pane of glass, using Prometheus and Jaeger data sources

The OpenTelemetry collector configuration (http://mng.bz/x4p6) is shown in greater detail in the following listing.

Listing A.1 OpenTelemetry collector configuration

```
receivers:
  otlp:                    <-- We receive signals via OTLP.
    protocols:
      grpc:
      http:
        cors:
          allowed_origins:
            - "http://*"
            - "https://*"
```