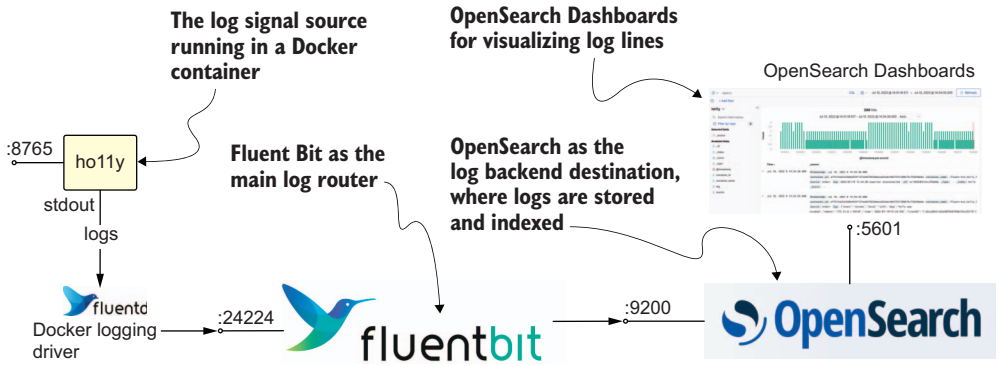


Figure 4.1 Example logging pipeline using Fluentd and Fluent Bit

Moving on to the implementation, we're once again using Docker Compose to stand up the pipeline, which is defined in the ch04/fluent-bit/docker-compose.yaml file. Let us review the pipeline step by step. I've configured the `ho11y` container in the Docker Compose file in a way that it is using the `fluentd` logging driver (since using Fluent Bit as the driver is not directly support there, yet).

Listing 4.1 Docker Compose configuration snippet for the signal source `ho11y`

```
ho11y:
    image: public.ecr.aws/mhausenblas/ho11y:stable
    ports:
      - 8765:8765
    logging:
      driver: fluentd
      options:
        tag: ho11y
        fluentd-address: localhost:8765
    depends_on:
      - fluent-bit
```

Exposes the ho11y HTTP API service port on port 8765 to make it accessible from the host machine (so we can invoke it with curl)

Configures the container to use the Fluentd logging driver

Defines that the ho11y container depends on the Fluent Bit log router, forcing the start-up sequence order

Next up is the Fluent Bit configuration, as seen in the following listing. As you can see, this takes, as one parameter, a file called fluent-bit.conf, which we will discuss later in this chapter.

Listing 4.2 Docker Compose configuration snippet for Fluent Bit

```
fluent-bit:
    image: fluent/fluent-bit:1.9.8
    volumes:
      - ./fluent-bit.conf:/fluent-bit/etc/fluent-bit.conf
    ports:
      - "24224:24224"
      - "24224:24224/udp"
```

Defines where the Fluent Bit configuration (routing info) can be found

Makes sure we open port 24224 so that we can listen on incoming log lines from the Fluentd logging driver in Docker