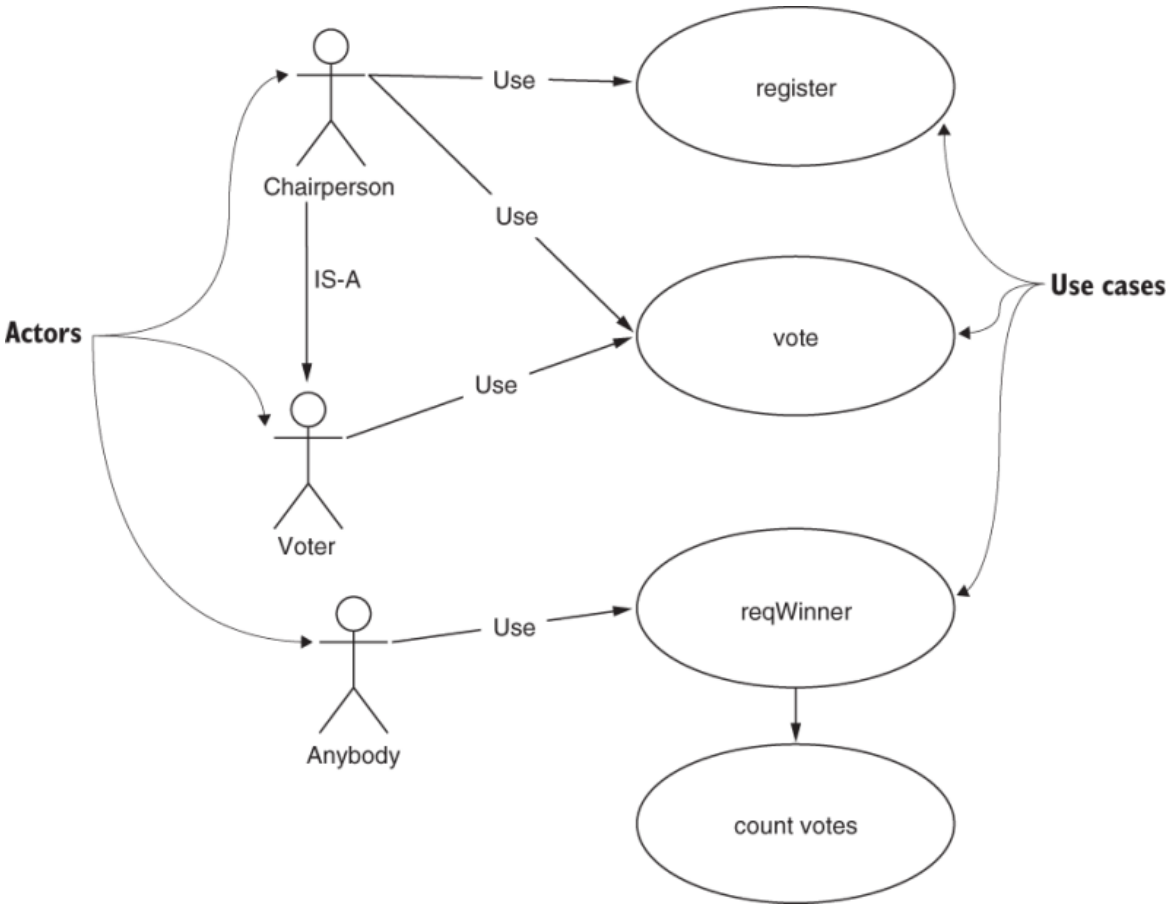


Figure 3.3 Ballot use case diagram

In this simple case, every call to the `reqWinner()` function will count the votes. Although this implementation is not efficient, you can leave it as such for now. In later versions, you can improve on this codebase. The diagram also captures one of the requirements of the problem: the fact that the chairperson is also a voter. The IS-A specialization relationship shows this: the chairperson *is a* voter, as shown in figure 3.3. The use cases are `register`, `vote`, and `reqWinner`; the function `count votes` is an internal function, as shown in the `count votes` use case of the diagram.

3.2.3 Incremental development of code