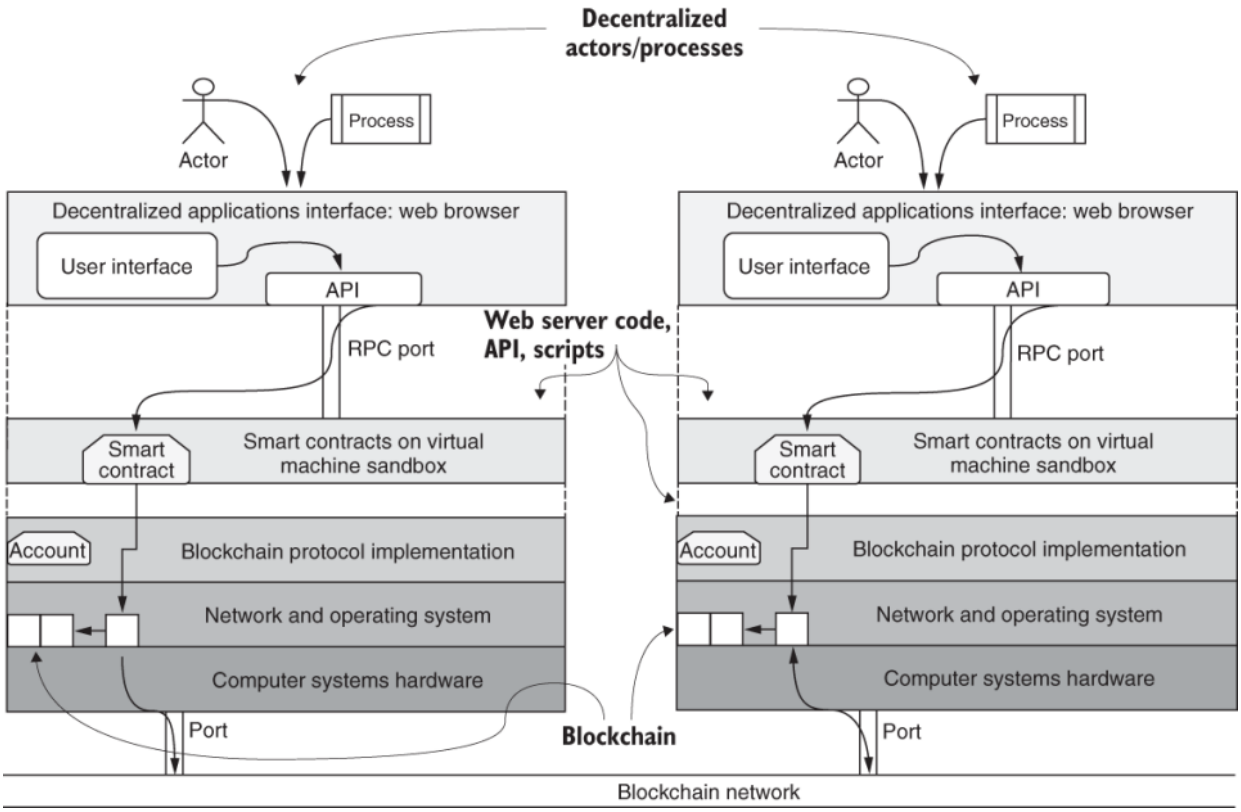


Figure 4.2 Architectural model of a blockchain network

> **NOTE** The architecture in figure 4.2 shows just two nodes. In practice, many such nodes with the same blockchain configuration--the same network ID number and the same genesis block, for example--are connected to make up the blockchain network of a decentralized system.

In this chapter, you'll learn to develop and program the top two layers of the Dapp stack of a blockchain network. But before you start, be warned that blockchain programming is complex and that the Dapp stack is different from a traditional web stack. Following are some of the artifacts and techniques that you'll use for Dapp development: