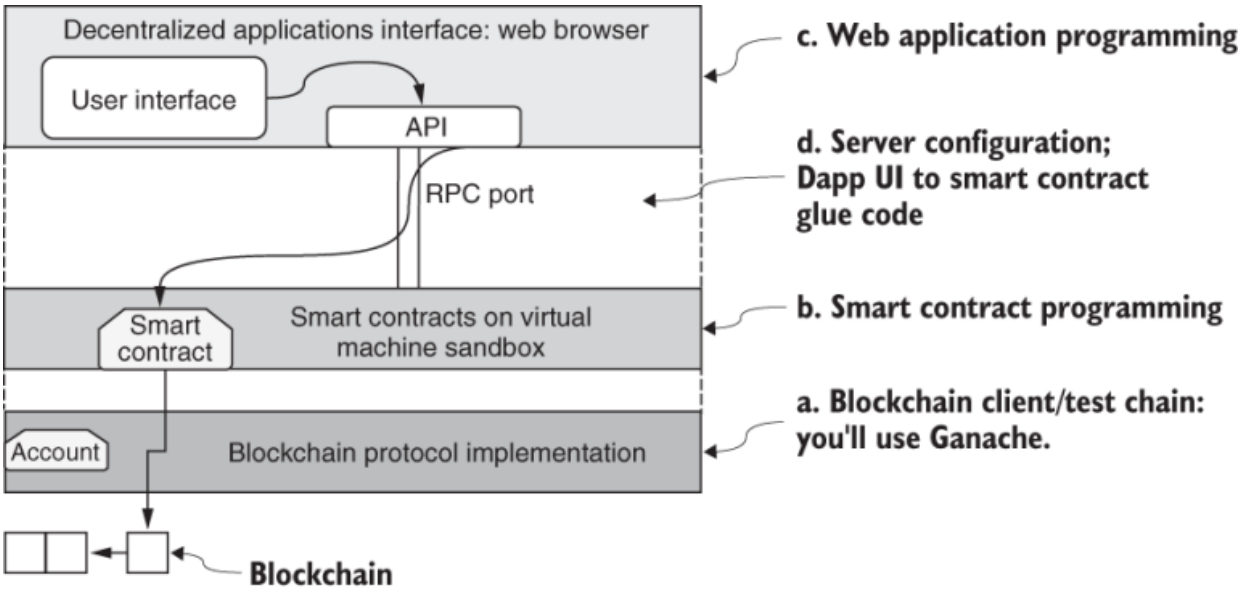


Figure 4.3 Dapp development layers

For a systematic organization of the many files and scripts of a Dapp, it’s good to follow a standard directory structure. For the counter problem in chapter 2, for example, you’d store smart contract-related files in the counter-contract directory and the web application-related files in the counter-app directory, as shown here with the root directory of Counter-Dapp:

```
├── Counter-Dapp
|   ├──   counter-app
|   └──   counter-contract
```

4.2 Install Ganache test chain

For the blockchain layer, several options are available, from the simulated VM that you used in the Remix IDE to a full-blown Geth (Go Ethereum) client. In this chapter, you’ll use a