```
        value = value + n;
        return;
    }

    function decrement (uint n) public {
        value = value - n;
        return;
    }}
```

Save the code in listing 5.1 as Counter.sol in the Remix editor. Compile it, making sure that there are no errors, and then set the environment to Injected Web3 (instead of JavaScript VM). Figure 5.7 shows the setting of the Inject Web3 supported by MetaMask.

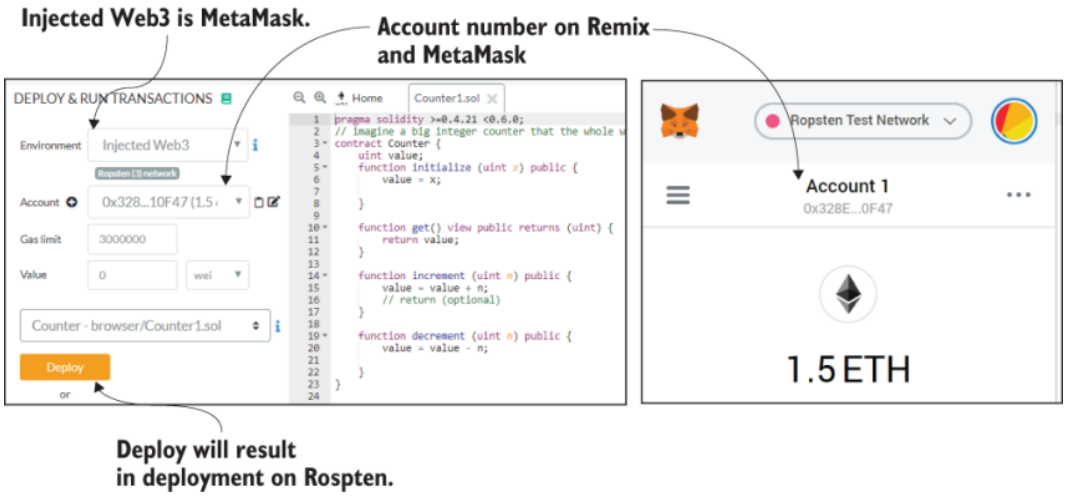


Figure 5.7 Remix-MetaMask-Ropsten link via Injected Web3 environment

Make sure that your account number in MetaMask shows up in the Account box in the Remix IDE, synchronizing the IDE with MetaMask and the Ropsten test network. If it does not, you will have to unlock MetaMask with your password and change the Privacy Mode setting to Off so that public participants can access your smart contract.

Now deploy the smart contract by clicking the Deploy button. You should see the deployment getting confirmed on the Ropsten network, with the transaction link on Ropsten Etherscan displayed in the console window:

```
https://ropsten.etherscan.io/tx/0xafeeb62d9a12a8d7ad08b38977040e795bd3d6f6d5e1d404c534aa28744e421d
```