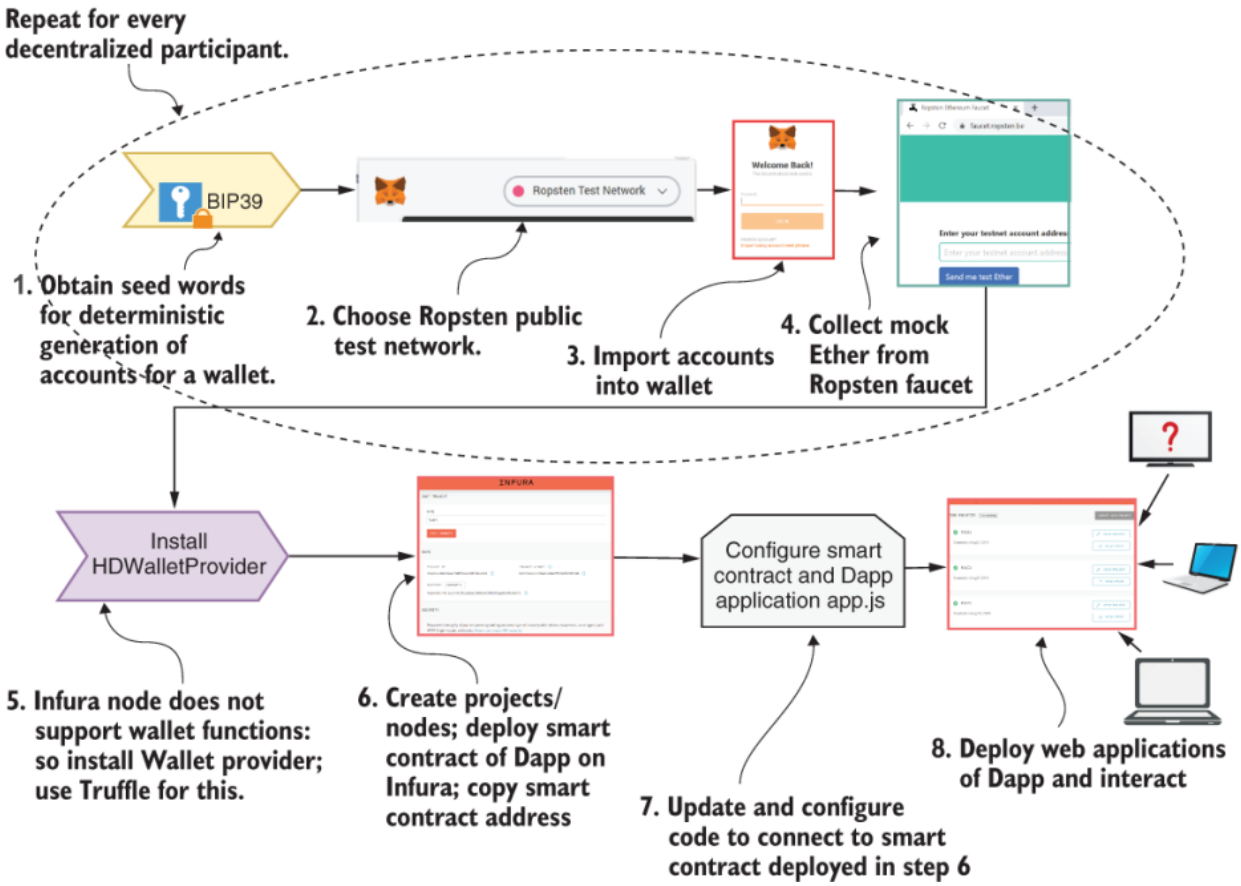


Figure 8.5 Steps in deploying a Dapp on Infura

8.4.1 Account generation and management

Ganache provided you an initial set of accounts with a balance of 100 test ether for each. You used the 12 seed words to import these accounts into your MetaMask. When you move from the test environment to development, you don’t have the Ganache test chain, so you have to self-manage the account addresses yourself. Step 1 of figure 8.5 describes the details. To begin, you need to generate a seed phrase to serve as a mnemonic for accounts. You’ll use the BIP39 (Bitcoin Improvement Protocol 39) method (figure 8.6);