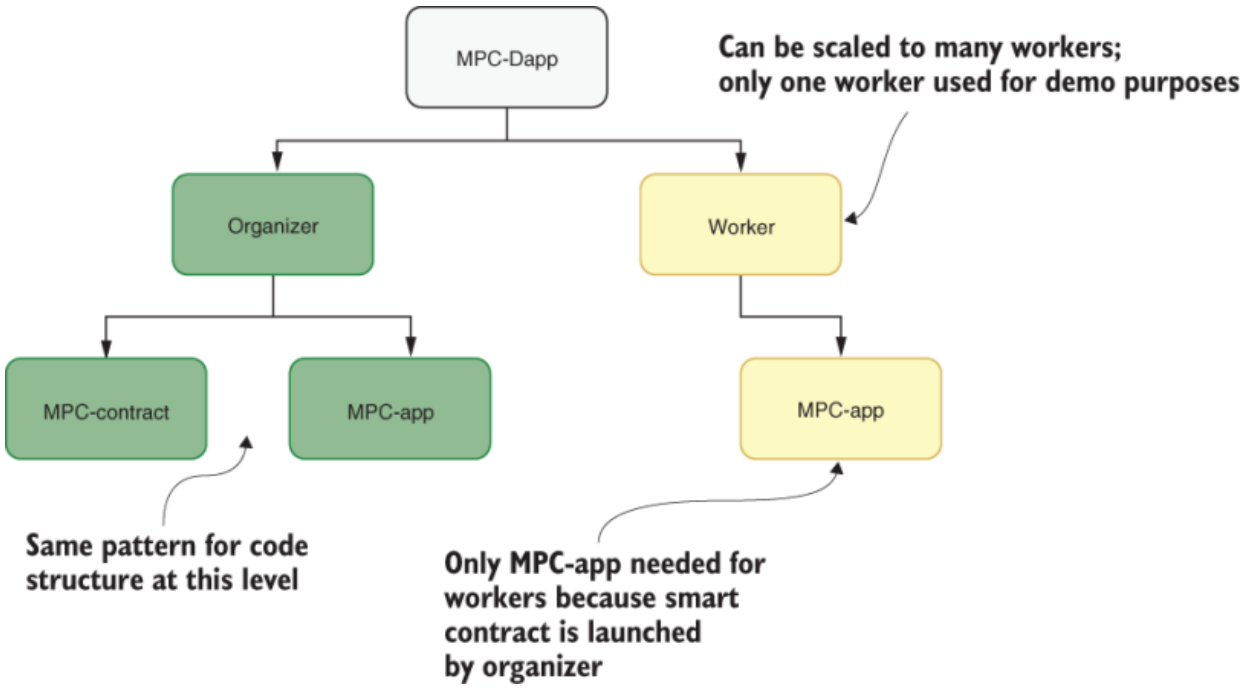


Figure 8.17 Directory structure of MPC for public deployment on Infura

8.6.2 Configure and deploy the organizer

You'll follow the same steps as in the blind auction deployment, but with certain MPC-specific configurations, such as providing the worker's address as a parameter for the smart contract deployment and channel escrow deposit by the organizer. You'll need a Infura Ropsten endpoint for deploying the MPC smart contract. You'll also need two sets of Ropsten accounts, and ports on your local machine, one set representing the organizer (sender of micropayment) and the second one representing the worker-receiver. You'll use these items to configure the MPC-contract directory: