configure the worker or receiver of micropayments with their parameters.

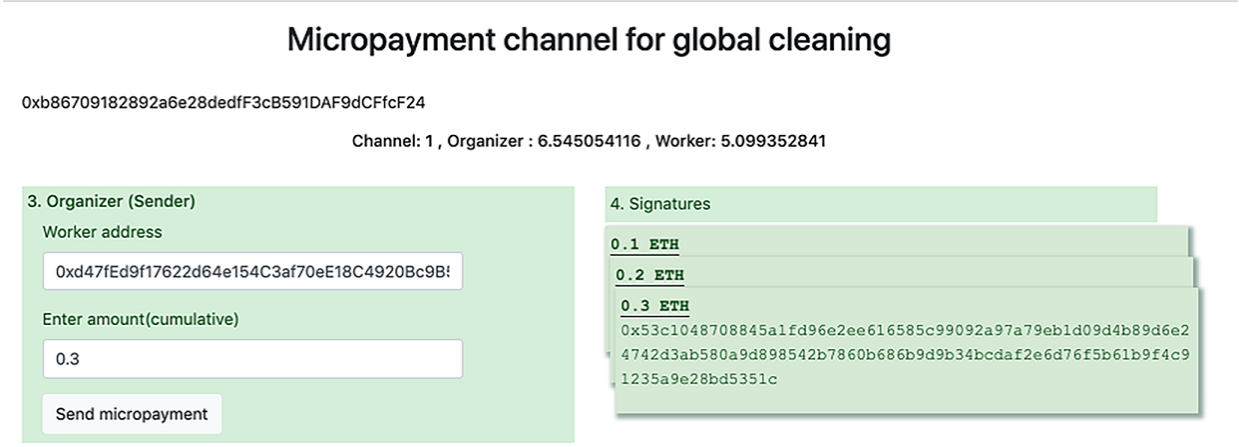


Figure 8.20 Three cumulative micropayments: 0.1, 0.2, and 0.3 ETH

8.6.3 Configure and deploy the worker

Configuring the worker and deploying involves working with the Worker path of the MPC-Dapp that only has the MPC-app component. Recall the directory structure in figure 8.17. Update src/js/app.js of MPC-app of the Worker directory with two parameters--the address of the smart contract and the ABI of the smart contract (included in app.js):

```
App = {
  web3: null,
  contracts: {},
  address:'0xb86709182892a6e28dedfF3cB591DAF9dCFfcF24',      ❶
  network_id:3,

  ...
```

❶ MPC smart contract address from MPCEnv.txt