- You must have an ether balance in the Ropsten account, which you can get through a Ropsten faucet (chapter 8).
- You must have an Infura account. Sign up at Infura, and create a project. Note the Ropsten endpoint number. Save the endpoint in the DCCEnv.txt file. Figure 11.13 shows a sample Infura endpoint.

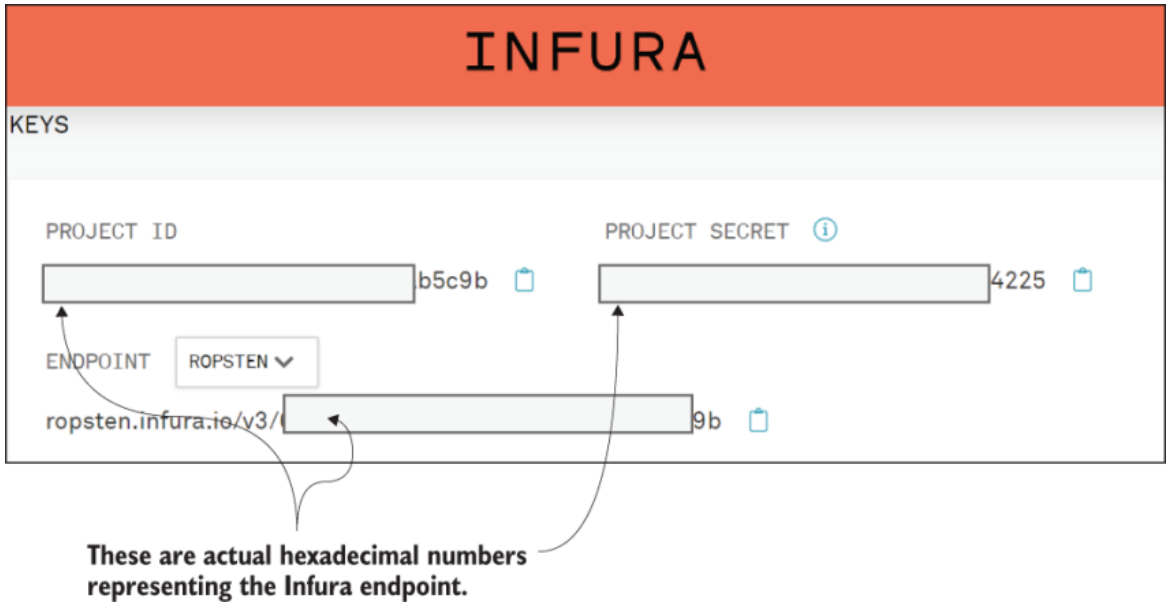


Figure 11.13 Ropsten endpoint on Infura

11.10.1 Deployment on Ropsten-Infura

In this section, you'll learn to transform a Dapp tested in a local test environment for deployment on public infrastructure. In this case, the Dapp is DCC-Dapp, and the web3 provider and the blockchain network are Infura and Ropsten, respectively. Download the codebase for DCC-Dapp-public.zip from the code base. Here are the steps for deployment on Ropsten. Unzip or extract all the files of DCC-Dapp-public.zip. Navigate to the DCC-