`decrement()`--the contract diagram includes a `constructor()` function and a `get()` function. The constructor, when invoked, deploys the smart contract code in the VM sandbox supported by the blockchain infrastructure. It also initializes the contract's state if the constructor has any parameters. The `get()` function is a utility function that returns the current value of the counter. This function is a view function; no transaction is recorded when it is invoked.

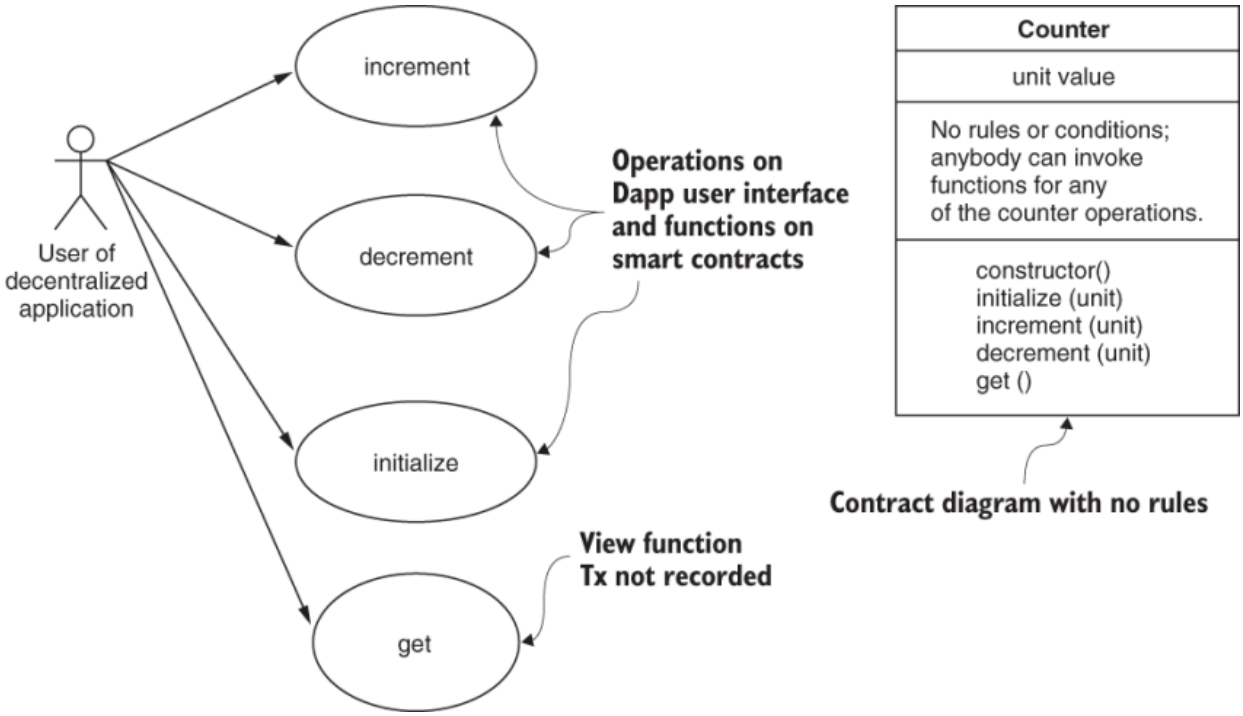


Figure 2.5 Counter contract diagram

Conceptualizing the diagram in figure 2.5 is an essential step in the design of a smart contract. This representation in figure 2.5 is not much different from the routine object-oriented class design. You can create this contract diagram by using diagrams .net (https://www.diagrams.net) or any