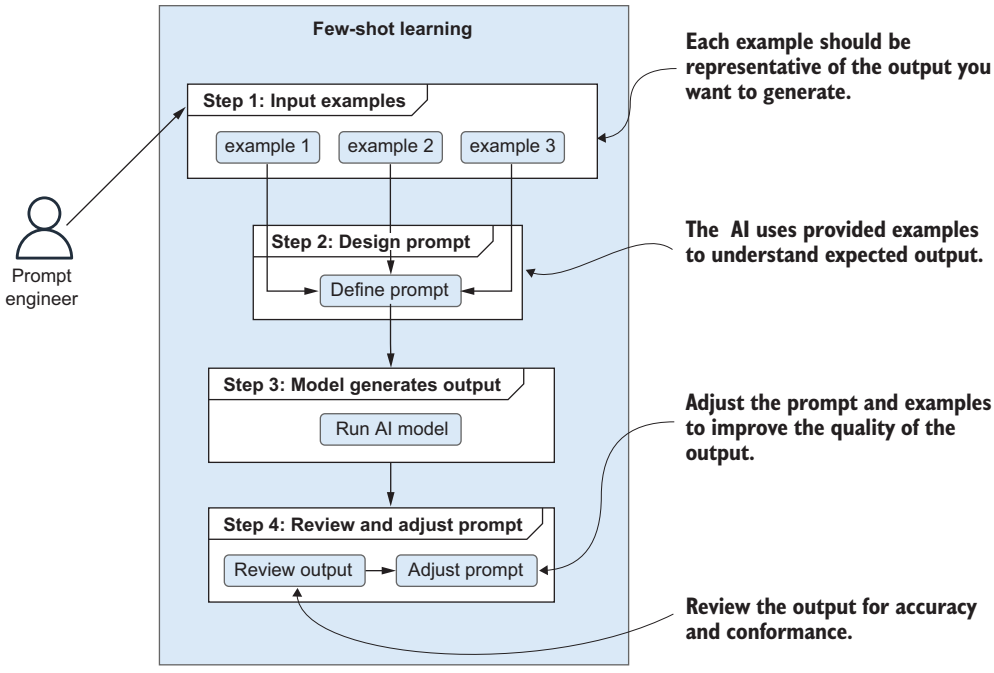


Figure 5.5 The step-by-step procedure for few-shot learning, where users provide a few examples to guide the AI model. The process involves compiling these examples into a prompt, generating output using the AI model, and then reviewing and adjusting the output as needed to achieve the desired results.

3. *Design prompt*—We craft a prompt that incorporates the provided examples, setting clear expectations for the model.
4. *Model generates output*—The LLM processes the prompt and generates an output based on the examples provided.
5. *Review output*—The generated output is then reviewed. In this case, the output might be a summary generated by the AI, such as "AI significantly affects modern society." However, in that case, our aim is to validate how the prompt is reliable and accurate enough to be used for subsequent queries.

The most important step when using this technique is the second one, where we provide examples. These examples should serve as a guide, helping the model to understand what is expected in terms of content, style, and structure. The key advantage of this technique is that it reduces ambiguity in the prompt, allowing the model to produce outputs that are more aligned with the user's intentions.

5.2.1 Examples of few-shot learning

In this example, we will generate a list of programming languages based on a few provided examples. The prompt is a simple and straightforward one with three representative examples.