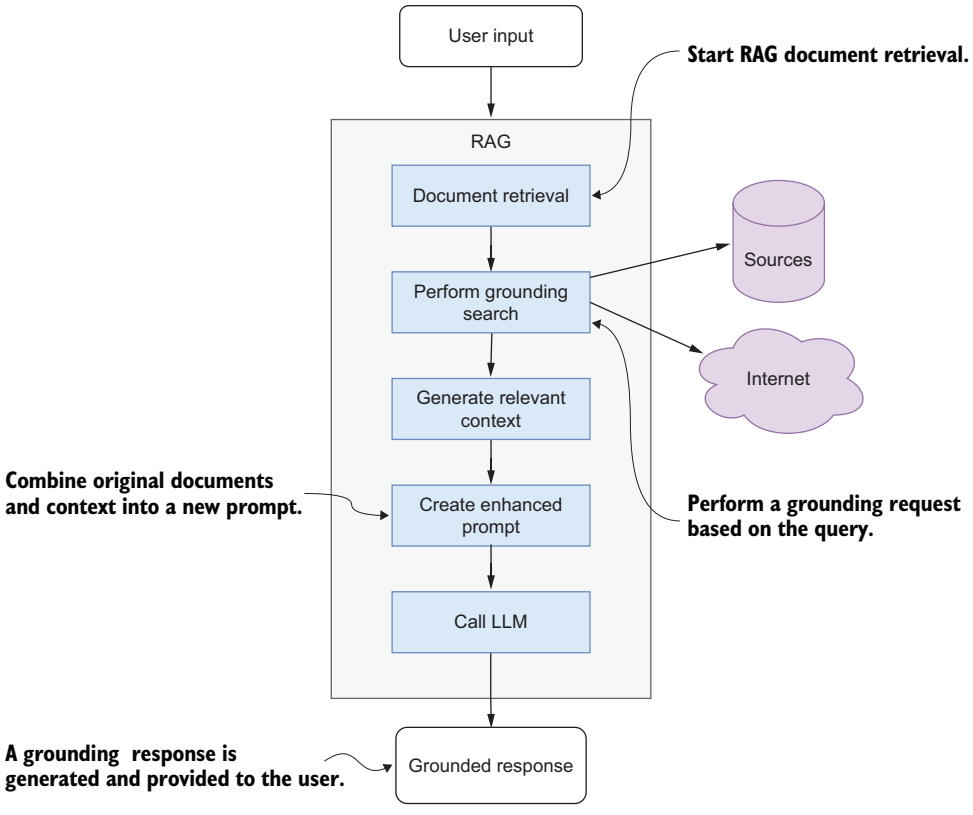


Figure 7.10 RAG approach for grounding LLMs with relevant information. The system performs a grounding search to extract the most relevant context, which is combined with the original user input to create an enhanced prompt. This prompt is then passed to the LLM, which generates the final grounded response that is provided to the user.

generated, the model can indicate how certain it is about its answers. For instance, when a model responds to a query, it can provide a log probability score for the first token, reflecting its confidence in having enough information to answer the question accurately. This approach allows for more refined decision making, as users can gauge the reliability of the information based on these confidence scores.

WARNING Per-token log probabilities are now supported by newer models like Gemini 2.0 Flash and Gemini 1.5 Flash, but they are not yet fully standardized as a first-class feature within the LangChain.js `ChatGoogleGenerativeAI` integration. Google AI provides a dedicated grounding API within its Vertex AI platform at https://mng.bz/QwK1. Please note that the availability of Vertex AI generative AI features, including the grounding API, may vary by region or country.