2 To run a specific example, make sure you use the following command structure:

```
$ npm run dev -w [chapter-folder]/[project-name]
```

For example, to run the chat-client-next project from chapter 2:

```
$ npm run dev -w ch02/chat-client-next
```

This command runs the specified project within the chapter folder using the npm workspace structure.

A lot of projects require an OpenAI API key to access the AI model. I provide instructions on how to set up your key and assign this to a project.

A.2 Accessing OpenAI APIs

To use the OpenAI APIs in the projects, you'll need to create an API key. Here's how to do it:

1 Visit the OpenAI platform: https://platform.openai.com/. If you don't have an account, you will be asked to create one.

2 Navigate to the API keys page: https://platform.openai.com/api-keys. Figure A.1 shows the page that you will see.

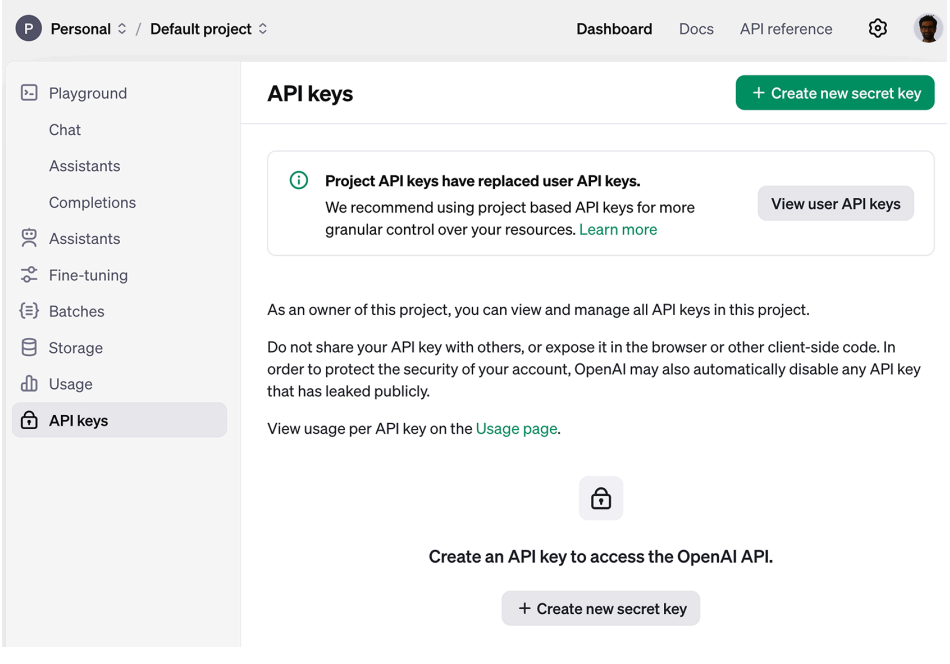


Figure A.1 API keys page in OpenAI