4 Obtain connection details. After creating the database, you will see a page with the connection details. Use the copy buttons to store the REDIS URL and Token in the clipboard (see figure A.7).

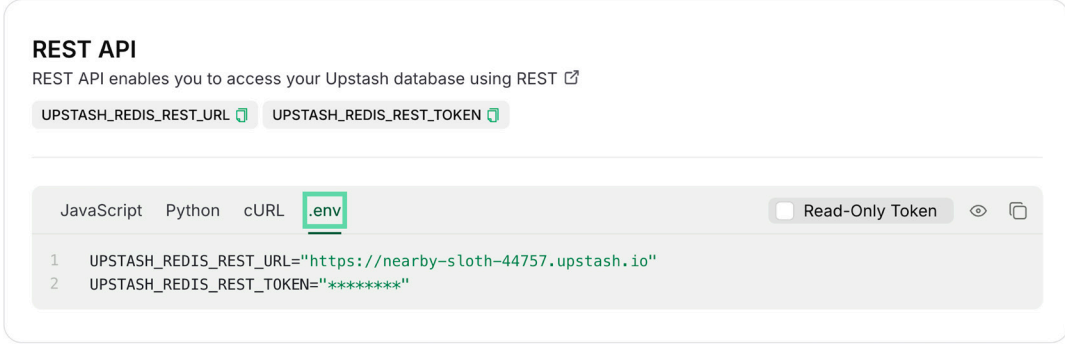


Figure A.7 Obtaining Redis credentials

5 Set the following environment variables in your project:
   - `UPSTASH_REDIS_REST_URL`—The endpoint URL
   - `UPSTASH_REDIS_REST_TOKEN`—The API token to access the Upstash API

A.5 Integrating Clerk.js authentication

To integrate Clerk.js into your Next.js application for secure authentication, follow these steps:

1 Create a Clerk account. Go to https://clerk.com/ and create an account if you haven't already. Once you have an account, log in to the Clerk dashboard.
2 Create a new application. In the Clerk dashboard, click the Create Application button. Then, on the new page, select Email as the authentication method and unselect all other options. Then enter a name for your application (see figure A.8).
3 Get the API keys. Go to the Application Configure page and scroll down to find the API Keys section. Then use the Copy button to store the following environmental variables for the Next.js application:
   - `NEXT_PUBLIC_CLERK_PUBLISHABLE_KEY`—The public API key
   - `CLERK_SECRET_KEY`—The private API token
4 Configure restrictions. To restrict access during testing, you'll need to enable Restricted Sign-up mode in the Clerk dashboard. However, the Allowlist option must be configured *before* enabling Restricted mode.
5 While still in the default Public mode, navigate to the Restrictions page.