
RAG approach for grounding LLMs with relevant information

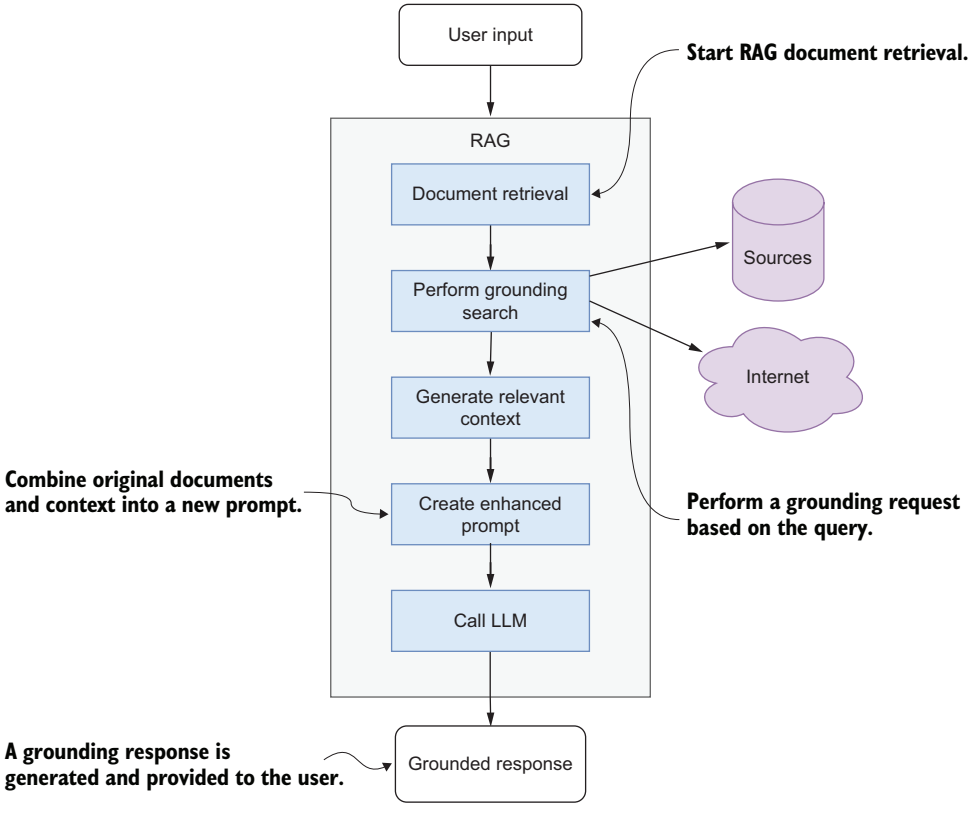

The system performs a grounding search to extract the most relevant context, which is combined with the original user input to create an enhanced prompt. This prompt is then passed to the LLM, which generates the final grounded response that is provided to the user.