component specifically associated with a particular route or URL, representing a distinct view or screen in your application. Components (such as `ChatList` or `ChatMessage`, typically found in a src/components folder) are smaller, reusable pieces of UI that are nested within pages or other components to build complex user interfaces efficiently.

Figure 2.5 provides the tree hierarchy of this component and its internal components, some of which contain only functionality and not visual presentation (e.g., `<AutoScroll/>`).

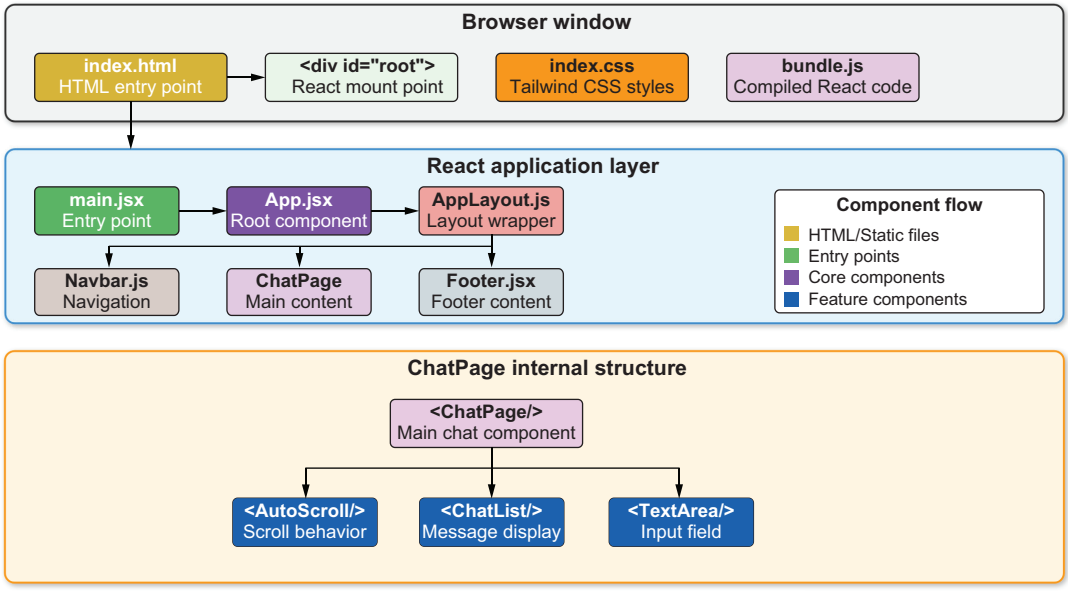


Figure 2.5 The browser loads index.html, which mounts the React application to a root div. The application starts with main.jsx (the entry point), rendering App.jsx. App.jsx uses AppLayout.js for the overall page structure, including Navbar.js, the central `ChatPage` content, and Footer.jsx. `ChatPage` further breaks down into three child components: `AutoScroll` (managing scroll behavior), `ChatList` (displaying conversation messages), and `TextArea` (handling user input). Data flows between these components, with `ChatList` holding the conversation history and `TextArea` managing the user's message prompt.

Out of the three child components, `<AutoScroll/>` does not contain any visual representation, so let's look at the process of implementing it.

2.5.2 Autoscroll

One of the most important UX considerations in a chat app is managing the conversation flow. `<AutoScroll/>` is a React component that automatically scrolls itself into view when it is at the bottom of the viewport and not currently visible.