The `<ChatList/>` component also consumes the application's loading state. The component displays a loading indicator while awaiting the AI response. This message informs the user that the application is currently busy while waiting for the backend to generate the response to the user.

Figure 2.7 provides an outline of the `ChatList` component and its child components. Dividing a page into semantic elements and developing them individually helps you understand how each component fits within the overall design.

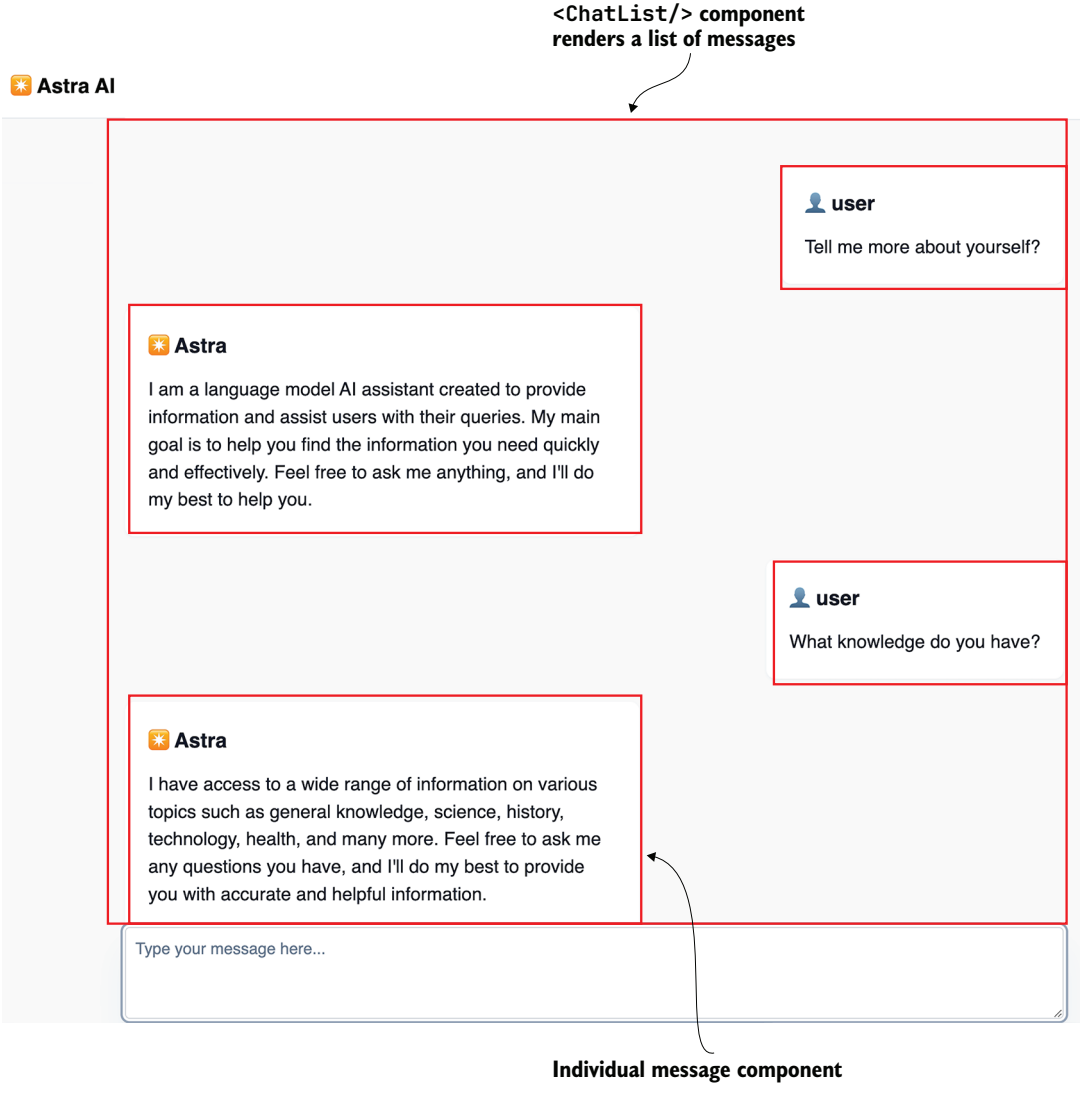


Figure 2.7 The `<ChatList/>` component is highlighted within the Chat page along with the chat message components.