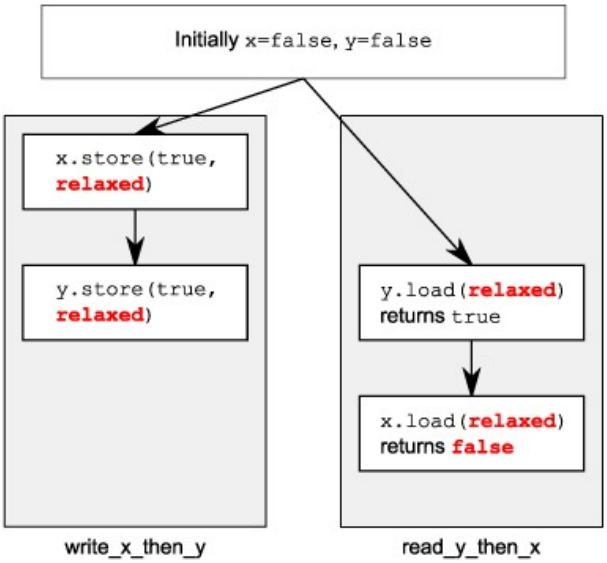


Let’s look at the slightly more complex example with three variables and five threads in the next listing.

Listing 5.6. Relaxed operations on multiple threads

```
#include <thread>
#include <atomic>
#include <iostream>

std::atomic<int> x(0),y(0),z(0);     <-1
std::atomic<bool> go(false);         <-2

unsigned const loop_count=10;

struct read_values
{
    int x,y,z;
};

read_values values1[loop_count];
read_values values2[loop_count];
read_values values3[loop_count];
read_values values4[loop_count];
read_values values5[loop_count];
```